

LEARNING MATERIAL

SEMESTER & BRANCH : 5th SEMESTER CIVIL ENGINEERING

THEORY SUBJECT : STRUCTURAL DESIGN – II (TH – 2)

NAME OF THE FACULTY : ER. SIDHANTA SEKHAR MAHAR

&

ER. NANDINI PRADHAN

STRUCTURAL DESIGN - II

Introduction:-

A structure is an assemblage of a group of elements or members capable of withstanding external loads and transmitting them safely to the foundation.

- Infrastructural development of the country mainly consists of structures like buildings, bridges etc. which mainly comprises of two basic construction materials i.e. concrete and steel.
- depending upon the orientation of structures and their structural use, the members are subjected to axial forces, bending or torsion or a combination thereof and are accordingly named based upon their nature of stresses i.e. tension, compression or flexural members etc.
- design of a building structure focuses two aspects namely: (i) functional design, (ii) structural design. The first part take into consideration the purpose it is to serve like requirements of ventilation, lighting etc. The second part consist in proportionating various elements of the structure for safe transmission of loads with due consideration of economy of materials and labour.

Common Steel Structures :

In earlier days manufacture of structural steel is confined to a very limited range which has been overcome by manufacture of high grade steels with desirable properties and composition through advancement technology.

Steel has been extensively used as a building material in various types of structures. Some common examples of steel structures are skeleton of high rise buildings, transmission line towers, overhead tanks, chimneys etc.

Steel structures can be broadly subdivided into two groups.

(i) Framed structures - ex: combination of beams, columns etc.

(ii) Shell structures :- ex - tanks, sheets, chimney etc.

Advantages of Steel Structure

Smaller weight to strength ratio :- It has smaller weight to strength ratio resulting in light weight structures for covering large spans.

Speed of erection :- Steel structure can be speedily constructed due to prefabrication in the workshop.

(3) Addition, alteration and Strengthening :- Addition and alteration of steel structures can be easily accomplished by welding and hence steel structures can be strengthened at any later time.

(4) Easy dismantling and transportation :- By using bolted connection, steel structures can be easily dismantled and conveniently handled. It can be easily transported to other sites being light weight & small volume.

(5) Gas & water tight joints :- Carefully made joints result in water and gas resistant construction like water tanks and pipe lines.

(6) High scrap & recyclable value :- It has high scrap value for it can be easily reused after dismantling & also can be economically recycled.

Disadvantages of steel structures

1. Corrosion susceptibility :- Steel structures when exposed to humid atmosphere are liable to corrosion.
2. High maintenance cost :- They require regular painting & maintenance.
3. Chemical deterioration :- It deteriorates when comes in contact with certain chemicals or gases.

- 4. fine & heat susceptibility
- 5. costly and susceptible to theft

TYPES OF STEEL :-

Steel is an alloy of iron & carbon and certain special properties can be imparted to it by addition of small percentage of manganese, sulphur, phosphorus, chromium etc.

The structural steel that is mainly used for manufacture of rolled steel sections can be broadly divided into -

- (1) standard structural or mild steel
- (2) High tensile steel

Properties of structural steel

The properties of steel may be divided into two groups.

- (a) physical properties
- (b) mechanical properties

(a) Physical properties

- (i) unit mass of steel (δ) = 7850 kg/m^3
- (ii) modulus of elasticity, $E = 20 \times 10^5 \text{ N/mm}^2$
- (iii) poisson's ratio, $\mu = 0.3$
- (iv) modulus of rigidity ' G ' = $0.769 \times 10^5 \text{ N/mm}^2$
- (v) coefficient of thermal expansion $\alpha_t = 12 \times 10^{-6} / ^\circ\text{C}$

(b) Mechanical Properties

The mechanical-properties of steel largely depends on its chemical composition, rolling methods, rolling thickness, heat treatment. Some of the important mechanical properties of structural steel are as follows:-

- (i) Yield stress (f_y)
- (ii) Ultimate stress (f_u)
- (iii) The mean percentage elongated on standard gauge length
- (iv) notch toughness

Rolled Steel Sections

Steel structures are built with steel sections of standard shape, sizes and length that are rolled in steel mill.


→ Various types of rolled steel sections standardised by BIS & manufactured are listed below:-

- (i) Rolled steel I-sections
- (ii) Rolled steel channel-sections
- (iii) Rolled steel angle sections
- (iv) Rolled steel 'T' sections
- (v) Rolled steel bars
- (vi) Rolled steel tubes
- (vii) Rolled steel plates

I-sections

The following 5 series of rolled steel I-section are manufactured in India

(1) Indian standard Junior Beams (ISJB)

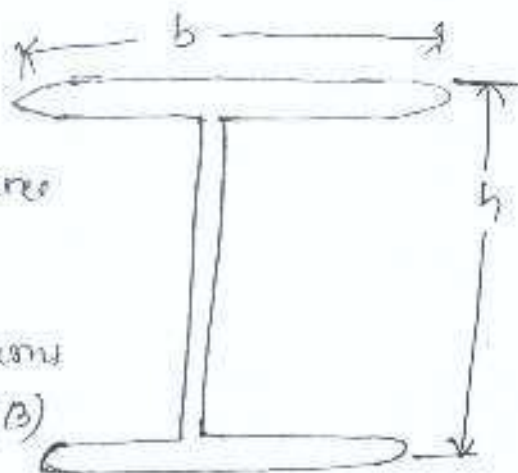

(2) Indian standard Light Beam (ISLB)


(3) Indian standard Medium Beam (ISMB)

(4) Indian standard wide flanged beam (ISWB)

(5) Indian standard Heavy Beams (ISHB)

Channel sections

These sections are classified into following four series:-

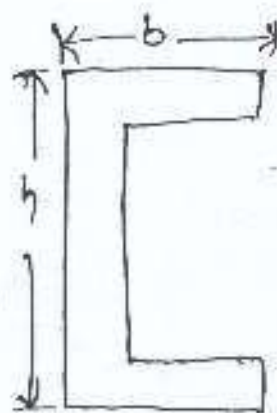

(1) Indian standard Junior channel (ISJC)

(2) Indian standard Light channel (ISLC)



(3) Indian standard medium weight channel (ISML)

(4) Indian standard special channel (ISSC)

Angle secⁿ

(i) Indian standard Equal Angle (ISA)

(ii) Indian standard Unequal Angle (ISA)

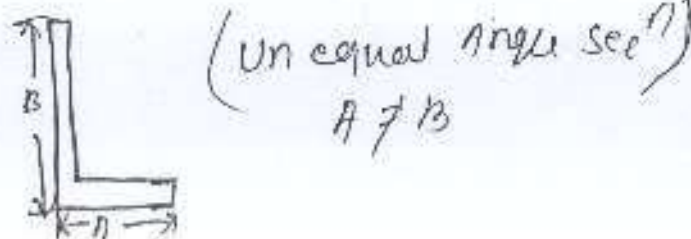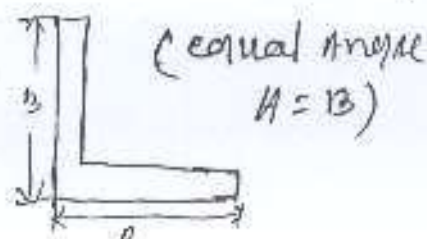

Special Consideration in steel design:

Steel design differs from other design methods in following aspects

(1) minm thickness — In view of corrosion, the minm thickness of the structural steel members are to be specified, otherwise a very small amount of corrosion may result in to reduction of large percentage of effective area, if very thin sections are used.

(2) Shape and size :-

Steel is manufactured in rolling mills and are available in standard shape sizes. Hence depending upon the site requirements and loading conditions steel structures are designed considering any of the available sections or their combinations.

(3) Connection design :-

during fabrication and assembling, various standard sections in a member & the members themselves in a structure are to be suitably connected by welding, bolting.

Loads & Load Combination

Loads

The forces that act on a structure are called Loads.

Types of Load

- (1) Dead load (DL)
- (2) Imposed load (IL)
- (3) Wind load (WL)
- (4) Earthquake load (EL)
- (5) Erection load (EL)

Dead Load

The loads that are permanently attached to a structure are called dead load & such loads do not change their magnitude, direction or position with time.

Ex: self weight of the members

Imposed Load

The loads that are not permanently attached to a structure or part of the structure but act over a substantial duration of time i.e. imposed upon the structure from outside, are known as imposed loads.

Live Load

The loads that are liable to change their position from time to time are called live loads.

Ex: weight of furnitures, movable partitions etc.

Wind Load

The forces exerted by horizontal as well as vertical components of wind is known as wind load.

Earthquake Load

The forces resulting from both horizontal and vertical components of acceleration imparted to the structures on the ground due to earthquake tremors are known as earthquake loads.

Load combinations

Of the various kinds of loads that are likely to act on a structure, a judicious combination of the probable loads is necessary to ensure safety as well as economy of the structure.

The recommended load combinations are

- | | |
|-------------|-----------------------|
| (1) DL | (6) DL + IL + EL |
| (2) DL + IL | (7) DL + IL + TL |
| (3) DL + WL | (8) DL + WL + TL |
| (4) DL + EL | (9) DL + IL + EL + TL |
| (5) DL + TL | |

DL = Dead Load

WL = Wind Load

TL = Temporary Load

IL = Imposed Load

EL = Earthquake Load

Structural Analysis

In order to find the effect of loads on a structure & its members & connections i.e. the internal forces or moments developed in the members of the structure, the structural analysis is carried out. The 2d code permits the following methods of analysis.

- (a) Elastic Analysis
- (b) Plastic Analysis
- (c) Advance Analysis
- (d) Dynamic Analysis

Elastic Analysis

This method of analysis is also known as working stress analysis. It is based on the assumption that no fibre of the member has yielded for the design load and stress is linearly proportional to strain.

→ The analysis may be carried out in two stages

- (1) First order Analysis
- (2) Second order Analysis

Plastic Analysis

In this method, it is assumed that a plastic hinge is formed when every fibre at a section reaches yield stress and after plastic hinge is formed, infinite rotation takes place without resisting any additional moment i.e. its resistance to moment remain constant.

Advanced Analysis

If the actual behaviour of a frame with full lateral restraints can be accurately modelled in respect of its actual behavior, an advanced structural analysis may be carried out.

Dynamic Analysis

Dynamic Analysis is carried out by seismic coefficient method or by response spectrum method.

Design & Design Philosophy

Steel structure should be designed and constructed to satisfy the requirements of strength, stability, serviceability, brittle fracture, fatigue, fire with due regard to economy.

The design philosophies are listed below

- (i) working stress method (WSM)
- (ii) ultimate load design (ULD)
- (iii) Limit state design (LSD)

Brief Review of principles of limit state design

- A structure may become unfit for use not only when it collapses but also when it violates the serviceability requirements of deflection, vibrations, cracks due to fatigue, corrosion & fire.
- In LSM, various limits are fixed to consider a structure as fit.
- This design is based on both probable load & probable strength.
- Thus philosophy of LSM design is to see that structure remains fit for use throughout its designed life by remaining within the acceptable limit of safety & serviceability requirements.

CHAPTER - 02 Structural Steel Fasteners & connections : Bolts

Introduction

Different elements or members of steel structures are required to be joined to one another either at their ends or at some intermediate length in order to facilitate the transmission or distribution of member forces or for the purpose of stability as the case may be, which is known as connection.

- The various elements of a steel structure like beams, columns etc are connected by fasteners or connectors.
- Different types of fasteners available in the design are :-

- (1) Rivets
- (2) Bolts
- (3) welds
- (4) pins

Bolted Connection

A bolt may be defined as a metal pin with a head at one end and a chamfer threaded portion at the other end to receive a nut.

- Steel washers are usually provided under the bolts as well as under the nut to distribute the clamping pressure on the bolted members.

→ The washer also prevents the threading to give large bearing pressure on the connecting members.

Types of Bolts

The following types of bolts are in common use.

- (1) Unfinished bolts or black bolts
- (2) Finished bolts or turned bolts
- (3) High strength friction grip bolts (HSFG bolts)

Unfinished or black bolts

These are also known as ordinary or common bolts. These bolts are made from low carbon mild steel round rods with square or hexagonal head and the shank is left unfinished or rough.

Finished bolts or turned bolts

These are close tolerance bolts which are formed mild-steel hexagonal rods and are made by turning to circular shape. Turned bolts may be either precision bolts or semi-precision bolts.

High Strength Friction Grip Bolts (HSFG)

These bolts are made from high strength steel rods like black bolts, but the surface of the shank of these bolts is kept unfinished and these bolts are tightened until very high tensile stresses are developed.

Advantages of Bolted connection

The following are the advantages of bolted connection:-

- (i) Use of simple tools & less skilled labour & working area.
- (ii) Speedy & noiseless erection
- (iii) Economical due to reduced labour & equipment cost.
- (iv) min strength reduction at joint due to less number of holes or bolts
- (v) Easy alteration or dismantling of connections.

Dis-advantages of Bolted connection

- (i) High cost of material
- (ii) Reduced tensile strength due to area reduction at the root of threads
- (iii) Gross area is reduced due to presence of bolt holes.
- (iv) Susceptibility to loosening of bolts under vibration and dynamic loads.
- (v) Large joint space, when heavy loads are required.

Classification of bolts based on load transfer mechanism:-

Based on load transfer mechanism, bolted connection may be divided into two groups

- (i) Bearing type or slip type connections
- (ii) Friction grip type or slip critical connections

Advantages of HSFG bolts over Bearing type Bolts

- (i) Rigidity of joints due to no slip condition
- (ii) No shearing or bearing stresses in members as the load transfer mechanism is mainly by friction.
- (iii) Large clamping forces provide high static strength of joints.
- (iv) Lack of stress concentration in holes leads to high fatigue strength
- (v) Smaller length of joint.

Disadvantages of HSFG Bolts over Bearing type bolts

- (i) Material cost of HSFG bolt is greater than that of ordinary bolts
- (ii) Special workmanship is required

Types of Bolted connections


There are two types of bolted connections

(a) Lap joint (b) Butt joints


Lap joints

In this type of joints, the two members to be connected overlap one another. This constitutes the simplest type of joint requiring no extra accessories like cover plates.

- If there is one line of bolts, it is called single bolted lap joint.
- If there is two lines of bolts, it is called a double bolted lap joint.
- In this case the bolts are subjected to shear in one plane & hence known as bolts in single shear.

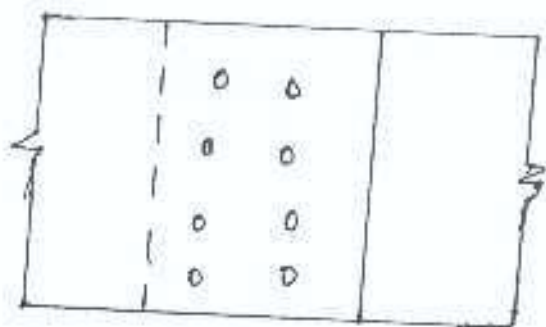

chain bolting

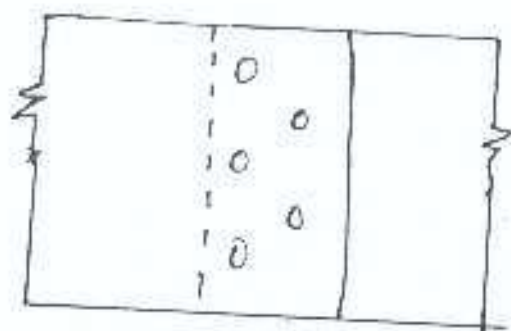

zig-zag bolting

Butt joint

In this type of joint, the two members to be connected are placed end to end i.e. butt against each other & the connection is made by providing additional plate either on one side (single cover) or on both the sides (double cover butt joint). These additional plates are called cover plates & the members are called main plates.

→ depending upon the number of lines of bolts on either sides of the butting plate, the butt joints are known as single bolted, double bolted or triple bolted butt joints.



Terminology

Pitch :- It is the c/c spacing of the bolts in a row measured along the direction of load.
(P)

Gauge distⁿ :- It is the distance b/n two consecutive bolts of adjacent rows and is measured at right angle to the direction of load.

Edge distⁿ :- It is the distance of center of bolt holes from adjacent edge of the plate measured at right angle to the direction of load.
(e)

End distance :- It is the distance of nearest bolt hole from end of the plate measured along the direction of load.
(e')

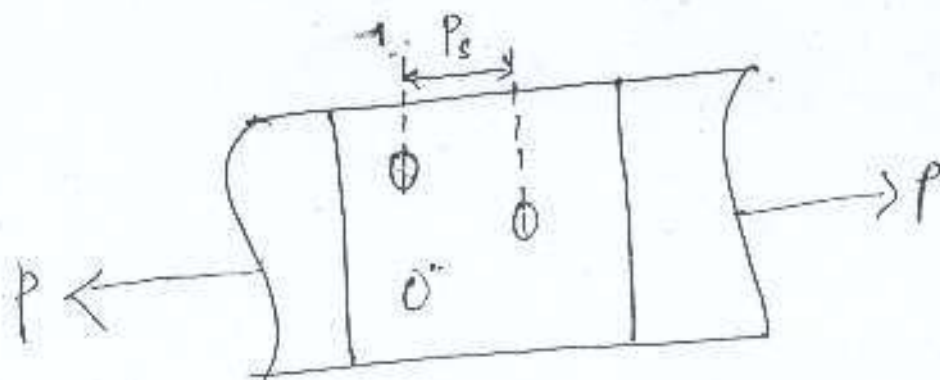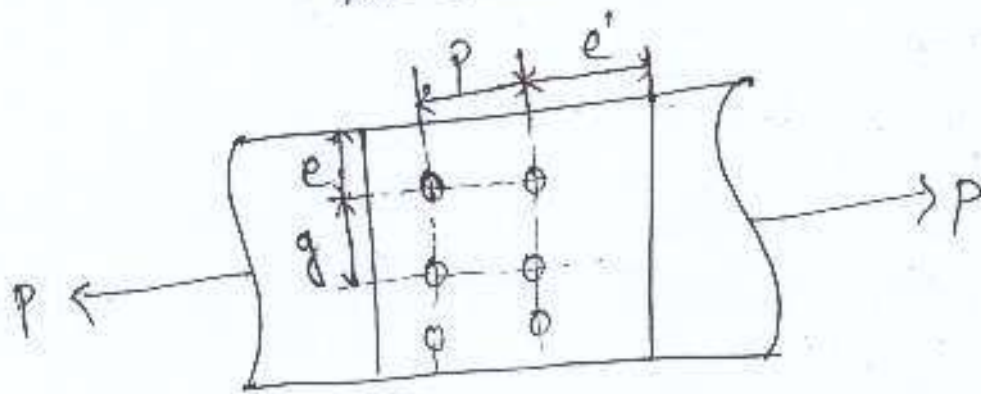

Staggered pitch (P_s) :-

It is the c/c distance of staggered bolts measured obliquely on the member.

Specification for bolted joints

(1) Pitch shall not be less than $2.5d$, where d is the nominal diameter of bolts.

(2) Pitch shall not be more than

(a) $16t$ or 200mm , whichever is less in case of tension members

(b) $12t$ or 200mm , whichever is less in case of compression members

where,

t = thickness of thinnest plate

(3) In case of staggered pitch, pitch may be increased by 50% values in specified above, provided gauge distance is less than 75mm .

(4) In case of butt joints max^m pitch is to be restricted to $4.5d$ for a distance of 1.5 times width of plate from butting surface.

(5) The gauge length $g' < (100 + 4t)$ or 200 whichever is less.

(6) Edge distance

$e > 1.7 \times \text{hole diameter}$ (Hand flame cut)

$e > 1.5 \times \text{hole dia}$ (rolled, machine flame cut).

$$(7) e < 12t \leq e, \text{ where } e = \sqrt{\frac{250}{f_y}}$$

$$e < (90 + 1t)$$


nominal dia of bolts (d) in mm	dia of hole (d ₀) in mm
12	13
14	15
16	18
18	20
20	22
22	24
24	26
27	30
30	33
over 33 mm	bolt dia + 3 mm

Failure of a bearing type bolted joint

A bolted joint may fail in any of the following manner

(1) Rupture of the plate b/w bolt holes :-

The strength of plate is reduced by bolt holes and the plate may tear off along the line of the bolt-holes, such type of failure is for tension members only.

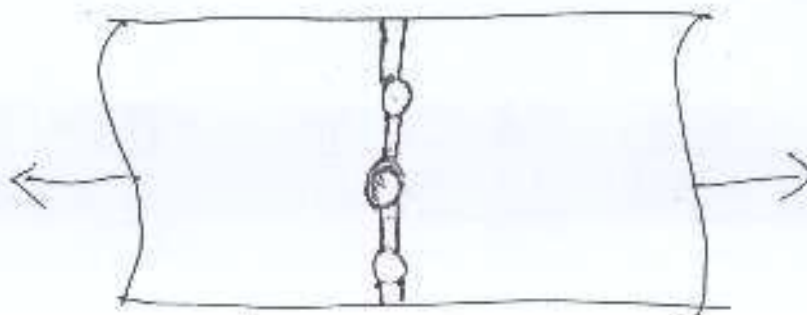

(ii) Shearing of Bolt :-

The bolts may fail by shearing, if the shearing stress exceeds their shearing strength. In lap joints & single cover butt joints, the bolts are sheared at one plane only. In a double cover butt joint, the bolts are sheared at two planes.

(iii) Bearing of Bolt on Plate :-

The plate or bolt is crushed if the compressive stress exceeds the bearing strength of the plate or bolt.

(iv) Bursting or cracking of the edge

The plate will crack at the back of a bolt, if it is placed very near to the edge of the plate.

Design strength of plates in a joint :-

Plates in a joint made with bearing type of bolts may fail due to (i) bursting of the edge ;

(ii) crushing of plates in bearing or (iii) rupture of plates. The bursting of the edges and crushing failure of plates are generally avoided if the min edge/end distances are provided.

⇒ The design tensile strength of a plate in the joint is the strength of the thinner member against rupture given by :-

$$T_{dn} = \frac{0.9 A_n f_u}{\gamma_{m2}}$$

γ_{m2} = partial safety factor = 1.25
 f_u = Ultimate tensile stress

$$A_n = (b - n d_o) t \quad \text{for chain bolting}$$

$$A_n = \left[b - n d_o + \sum \frac{p_i^2}{4g_i} \right] t \quad \text{for staggered bolting}$$

where,

- A_n = net effective area of the plate at critical section
- b = width of the plate
- t = thickness of thinner plate of the joint
- d_o = dia. of the bolt hole
- g = Gauge distⁿ
- p_i = length of the staggered pitch
- n = no. of bolt holes at critical section
- i = subscript for summation for all inclined legs.

Design strength of bearing type of bolts in a joint

The design strength of bearing type of bolts is the least of the —

(a) Shear capacity or

(b) Bearing capacity

Shear capacity or shear strength (V_{dsb})

The design shear strength of the bolt,

$$V_{dsb} = \frac{V_{nsb}}{\gamma_{mb}}$$

where,

γ_{mb} = partial safety factor of material of bolt

V_{nsb} = nominal shear capacity of bolt

$$V_{nsb} = \frac{f_{ub}}{f_3} (\eta_n A_{nb} + \eta_s A_{sb})$$

where,

f_{ub} = ultimate tensile strength of a bolt

η_n = no. of shear planes with threads intercepting the shear plane

η_s = no. of shear planes without threads intercepting the shear plane

A_{sb} = nominal plain shank area of the bolt = $\frac{\pi}{4} d^2$

A_{nb} = net shear area of the bolt at threads

$$= 0.78 \frac{\pi}{4} d^2$$

Reduction factors for shear capacity of bolts

(i) Reduction factor for long joints (β_{Lj})

when the length of the joint l_j exceeds $16d$, the nominal shear capacity V_{nsb} shall be reduced by the factor

β_{Lj}

$$\beta_{Lj} = 1.075 - \frac{l_j}{200d}$$

Subject to the limits $0.75 \leq \beta_{Lj} \leq 1.0$

(ii) Reduction factor for large grip length (β_{Lg})

when the grip length l_g exceeds 5 times the diameter 'd' of bolts, the design shear capacity shall be reduced by a factor β_{Lg} .

$$\beta_{Lg} = \frac{8d}{3d + l_g}$$

(iii) Reduction factor for packing plate (β_{Pk}) :-

If the thickness of packing plates is more than 6mm in a joint, the shear capacity is reduced by a factor

$$\beta_{Pk} = 1 - 0.0125 t_{Pk}$$

t_{Pk} = Thickness of the thicker packing in 'mm'.

Thus the complete formula for nominal shear capacity as bolt

$$V_{nsb} = \frac{f_{ub}}{1.1} (n_f A_{nf} + n_s A_{sb}) \beta_{Lj} \beta_{Lg} \beta_{Pk}$$

Bearing capacity or bearing strength (V_{dpb}) :-

The design bearing strength of the bolts V_{dpb} is given by

$$V_{dpb} = \frac{V_{nfb}}{\gamma_{mb}}$$

where,

V_{nfb} : nominal bearing strength of a bolt

$$V_{nfb} = 2.5 k_b d t f_u$$

where,

k_b is smaller of

$$\left\{ \begin{array}{ll} (i) \frac{e}{3d_0} & (ii) \frac{p}{3d_0} - 0.25 \\ (iii) \frac{f_{ub}}{f_u} & (iv) 1.0 \end{array} \right.$$

e & p : end distⁿ & pitch distⁿ

d_0 : dia. of bolt hole

Assumptions of bearing bolts

(1) The stress distribution on the plates between the bolt holes is uniform

(2) The friction between the plates is negligible

(3) The bearing stress is uniformly distributed over the cross-section of the bolt

(4) The bolts in a group share the direct load equally

or the load is shared equally in bolts in a row

Efficiency of a joint (η)

The efficiency of a joint is the ratio of the strength of the joint and the original strength of the members without bolt holes.

Mathematically,

$$\eta = \frac{\text{strength of the joint}}{\text{strength of solid plate}} \times 100$$

• Problem-1

Two steel plates (Fe 410) of 16mm thick are to be joined by 24mm dia bolts of grade 4.6. Assuming a pitch of 60mm and edge distance of 40mm, calculate the strength of the bolt for the following cover.

(a) Lap joint.

(b) Single cover butt joint, cover plate being 12mm thick.

(c) double cover butt joint, each cover plate 10mm thick.

Soln

Given data

Thickness of the plate, $t = 16 \text{ mm}$, Pitch (P) = 60mm

edge distance (e) = 40mm


for Fe 410 grade of steel, $f_u = 410 \text{ N/mm}^2$, $f_y = 250 \text{ N/mm}^2$

dia. of bolt (d) = 24mm

dia. of hole (d_o) = $24 + 2 = 26 \text{ mm}$

for grade of bolt 4.6, $f_{ub} = 400 \text{ N/mm}^2$

(g) lap joint

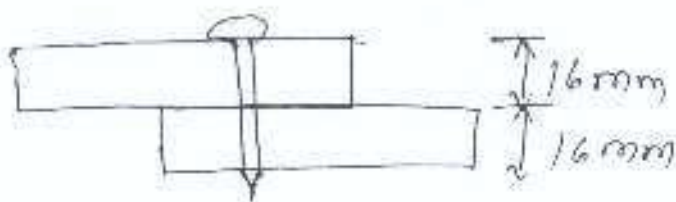

There is only one plane of shearing at the level of two plates, so the bolt will be in single shear & bearing.

Strength of the bolt in shearing

Assuming that the threads intercept the shear plane, the no. of shear planes at thread $n_t = 1$

the " " " at shank $n_s = 0$

Net shear Area of the bolt $(A_{nb}) = 353 \text{ mm}^2$

There is no reduction factor

Nominal shear strength

$$\begin{aligned} V_{nsb} &= \frac{F_{ub}}{f_3} (n_t A_{nb} + n_s A_{sb}) \\ &= \frac{400}{f_3} (1 \times 353) \\ &= 87.52 \text{ kN} \end{aligned}$$

Design strength in shear (V_{dsb})

$$V_{dsb} = \frac{V_{nsb}}{\gamma_{mb}} = \frac{87.52}{1.25} = 65.22 \text{ kN}$$

↑ $V_{des} = 65.22 \text{ kN}$ ↑

Strength of bolt in bearing ($V_{d/b}$)

Nominal bearing strength of the bolt ($V_{n/b}$)

$$V_{n/b} = 2.5 k_b d t f_u$$

where k_b

$$(i) \frac{e}{3d_0} = \frac{40}{3 \times 26} = 0.513$$

$$(ii) \frac{p}{3d_0} - 0.25 = \frac{60}{3 \times 26} - 0.25 = 0.519$$

$$(iii) \frac{f_{ub}}{f_u} = \frac{400}{410} = 0.975$$

$$(iv) 1.0$$

least
0.513

$$\therefore k_b = 0.513$$


$$V_{n/b} = 2.5 \times 0.513 \times 21 \times 16 \times 410 = 201.917 \text{ kN}$$

design strength in bearing ($V_{d/b}$)

$$V_{d/b} = \frac{201.917}{1.25} = 161.533 \text{ kN}$$

The strength of bolt = min^m of strength in shear & bearing i.e. 161.533 kN

(b) single cover butt joint

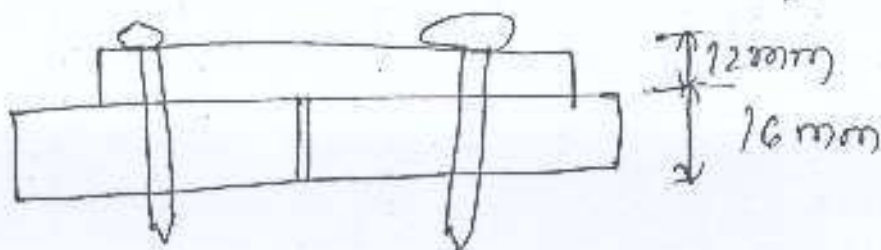

In this case also the bolt will be in single shear and bearing. strength of the bolt in single shear at the junction of cover plate and main plate.

$$V_{dsb} = 65.22 \text{ kN}$$

→ The bearing of the bolt will be calculated against the thinner plate i.e. cover plates of thickness $t = 12 \text{ mm}$

strength of bolt in bearing (V_{dpb})


$$V_{dpb} = \frac{2.5 k_b d t f_u}{\gamma_{mb}}$$

$$= \frac{2.5 \times 10.513 \times 24 \times 12 \times 410}{1.25} = 121.75 \text{ kN}$$

∴ strength of the bolt = 65.22 kN

(c) Double cover butt joint

The bolt will be in double shear & bearing

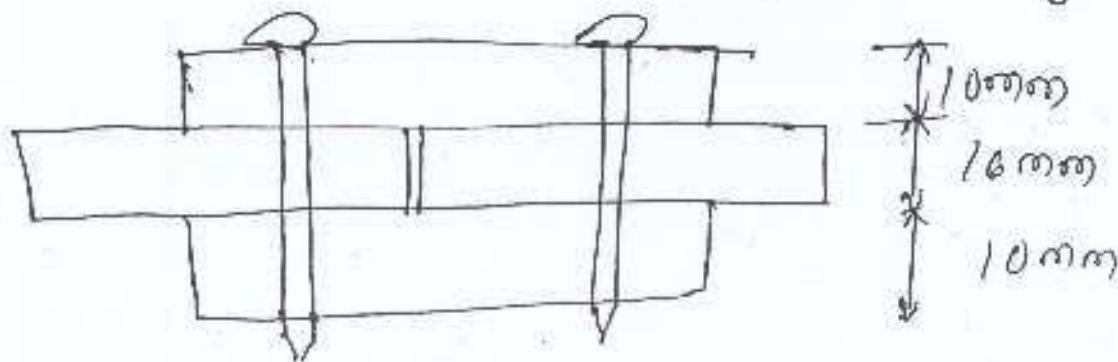

The thickness to be considered for bearing will be the least of the aggregate thickness of cover plates or thickness of the main plate i.e. $t = 16 \text{ mm}$

The strength of bolt in double shear

$$V_{dsb} = \frac{f_{ub}}{f_3} \left(\frac{\eta_1 A_{nb} + \eta_2 A_{sb}}{\gamma_{mb}} \right)$$

(Here $\eta_1 = 1$, $\eta_2 = 1$) $A_{nb} = 353 \text{ mm}^2$, $A_{sb} = 452 \text{ mm}^2$

$$= \frac{400}{f_3} \left(\frac{1 \times 353 + 1 \times 452}{1.25} \right) = 148.73 \text{ kN}$$

$$V_{dsb} = 148.73 \text{ kN}$$

Strength of bolt in bearing (V_{dpb})

$$V_{dpb} = \frac{2.5 k_b d f_y}{\gamma_{mb}}$$


$$= \frac{2.5 \times 0.513 \times 24716 \times 410}{1.25} = 161.53 \text{ kN}$$

Strength of bolt = 148.73 kN (Ans)

Problem

Find the max^m force that can be transmitted through a double bolted chevin lap joint consisting of 6 bolts in 2 rows. Given that M16 bolts of grade 4.6 & plates of Fe 410 are used. Also find the efficiency of the joint.

Solⁿ

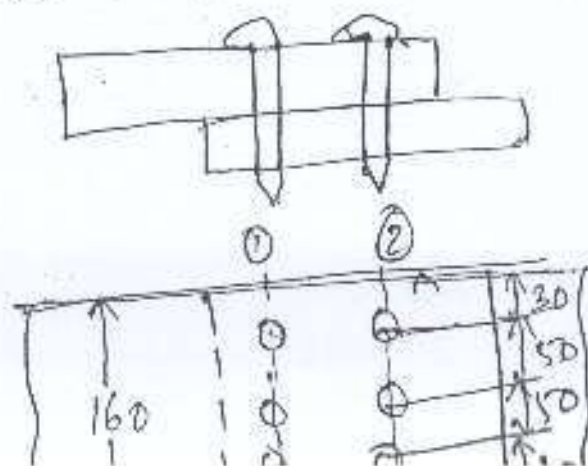

Given data

Thickness of plate $(t_1) = 10\text{mm}$, $(t_2) = 12\text{mm}$

total no. of bolts $n = 6$

dia. of bolt $(d) = 16\text{mm}$

dia. of bolt hole $(d_o) = 18\text{mm}$

pitch $(P) = 50\text{mm}$

edge $(e) = 30\text{mm}$

Grade of bolt = 4.6, $f_{ub} = 400\text{ N/mm}^2$

Grade of plate Fe 410, $f_u = 410\text{ N/mm}^2$, $f_y = 250\text{ N/mm}^2$

Solⁿ

Strength of plate in the joint due to rupture

thickness of thinner plate $(t) = 10\text{mm}$

width of plate $(b) = 160\text{mm}$

$$T_{dn} = \frac{0.9 A_n f_y}{\gamma_{m1}}$$

$$A_n = (b - n d_o) t \quad (\text{for chain bolting})$$

$$= (160 - 3 \times 18) \times 10 = 1060\text{mm}^2$$

design strength of plate (T_{dn})

$$T_{dn} = \frac{0.9 A_n f_y}{\gamma_{m1}} = \frac{0.9 \times 1060 \times 250}{1.25} = 312912\text{ N}$$

Strength of bolt in the joint

(i) design strength in shear (V_{dsb})

no. of shear plane at threaded $n_t = 6$

no. of " " " " shank $n_s = 0$

$$A_{nb} = 0.7854 d^2 = 157 \text{ mm}^2$$

Since there is no reduction factor so $\beta_1 \beta_2 \beta_s = 1$

nominal shear strength (V_{nsb})

$$V_{nsb} = \frac{f_{ub}}{\sqrt{3}} (n_t A_{nb} + n_s A_{sh})$$

$$= \frac{400}{\sqrt{3}} (6 \times 157)$$

$$= 217.516 \text{ kN}$$

\therefore design strength in shear (V_{dsb})

$$V_{dsb} = \frac{V_{nsb}}{\gamma_{mb}} = \frac{217.516}{1.25} = 174.036 \text{ kN}$$

(ii) design strength in bearing (V_{drb})

$$V_{drb} = \frac{\gamma_{nrb}}{\gamma_{mb}}$$

$$\gamma_{nrb} = 2.5 k_b d t f_u$$

$$k_b \left\{ \begin{array}{l} \text{(i)} \frac{e}{3d_0} = \frac{30}{3 \times 18} = 0.56 \end{array} \right.$$

$$\left\{ \begin{array}{l} \text{(ii)} \frac{p}{3d_0} - 0.25 = \frac{50}{3 \times 18} - 0.25 = 0.676 \end{array} \right. \left. \begin{array}{l} \text{least} \\ = 0.56 \end{array} \right.$$

$$\left\{ \begin{array}{l} \text{(iii)} \frac{f_{ub}}{f_u} = \frac{400}{410} = 0.9756 \end{array} \right.$$

$$\therefore K_b = 0.56$$

$$V_{nfb} = 2.5 \times 0.56 \times 16 \times 10 \times 410 = 91.870 \text{ kN/bolt}$$

design strength in bearing / bolt,

$$V_{d/b} = \frac{V_{nfb}}{\gamma_{mb}} = \frac{91.870}{1.25} = 73.49 \text{ kN}$$

$$\begin{aligned} \text{design strength in bearing of 6 bolts} &= 6 \times 73.49 \text{ kN} \\ &= 440.832 \text{ kN} \end{aligned}$$

$$\text{design strength of bolts} = 174.036 \text{ kN}$$

$$\therefore \text{strength of the joint} = \text{min of strength of plate or strength of the bolts} = 174.036 \text{ kN}$$

Efficiency of the joint

$$f_y = 250 \text{ N/mm}^2$$

$$A_g = 160 \times 10 = 1600 \text{ mm}^2$$

$$T_{dg} = \frac{A_g f_y}{\gamma_{m0}} = 1600 \times \frac{250}{1.1} = 363.636 \text{ kN}$$

$$\eta = \frac{\text{strength of the joint}}{\text{strength of solid plate}} \times 100$$

$$= \frac{174.036}{363.636} \times 100 = 47.86\%$$

Shear Capacity of HSFG Bolts

The nominal shear capacity of a bolt is given by

$$V_{nsf} = \mu_f n_e k_h f_o$$

where,

μ_f = coefficient of friction

n_e = no. of effective interfaces offering frictional resistance to the slip.

k_h = 1.0 for fasteners in clearance holes
= 0.85 " " oversized and short slotted holes
= 0.70 for fasteners long slotted holes

f_o = min^m bolt tension = $A_{nb} \cdot f_u$

A_{nb} = net area of the bolt at head

f_u = proof stress = $0.70 f_{ub}$

Problem

- Two plates of 12mm thick are joined by double-cover butt joint with 20mm dia HSFG bolts of property class 10.9 and cover plates of 8mm thick. Assuming that the fasteners are in clearance holes and slip factor as 0.2, determine the shear capacity of a bolt if slip resistance is designated at (i) service load (ii) ultimate load.

Solⁿ
For 20mm dia HSFG bolts of property class 10.9,
t.t. = 1140 N/mm²

$$A_n = 241 \text{ mm}^2$$

for fasteners in clearance holes, $K_n = 1.0$

for double cover butt joint $n_e = 2$

slip factor $\mu_s = 0.25$

min^m bolt tension at installation

$$F_o = 0.7 f_{ub} \times A_n = 0.7 \times 1040 \times 241 = 178.36 \text{ kN}$$

nominal shear capacity of bolt (V_{nsf})

$$V_{nsf} = \mu_s n_e K_n F_o$$

$$= 0.25 \times 2 \times 1.0 \times 178360 = 89.18 \text{ kN}$$

(i) Shear capacity of a bolt, if slip resistance is designated at service load $\gamma_{mf} = 1.1$

$$V_{sf} = \frac{V_{nsf}}{\gamma_{mf}} = \frac{89.180}{1.1} = 81.07 \text{ kN}$$

(ii) Shear capacity of a bolt, if slip resistance is designated at ultimate load $\gamma_{mf} = 1.25$

$$V_{sf} = \frac{V_{nsf}}{\gamma_{mf}} = \frac{89.180}{1.25} = 71.34 \text{ kN}$$

Design procedure for Bolted joint

(1) The size of the bolt is determined from the unwinn's formula $d = G/t$ where t = thickness of the plate in mm & d is the nominal dia of bolt.

2. The strength of the bolts in shear and bearing are computed assuming suitable value of pitch, edge distance and location of shear planes. The minm of the above is taken as the bolt value and the numbers of bolts required is obtained by dividing the applied force by bolt value.
3. The bolts are suitably arranged to produce a convenient and efficient joint.
4. The joint is checked for rupture strength of the plate with the assumed arrangement of bolts, which should be more than the applied load.

Problem

Two steel plates of 10mm and 12mm thick are to be joined by a lap joint so as to transmit a load of 120 kN using 20mm dia bearing bolts of property class 4.6 and plates of grade Fe 410. Find the numbers and arrangement of bolts, if each of the plates are —
 (i) 100 mm wide (ii) 200 mm wide.

Soln Given data

for M20 bolts of property class 4.6, $f_{ub} = 400 \text{ N/mm}^2$

dia. of bolt (d) = 20 mm

dia. of bolt hole (d_o) = $20 + 2 = 22 \text{ mm}$

$A_{nb} = 245 \text{ mm}^2$, $A_{sb} = 314 \text{ mm}^2$, $f_{mb} = 1.25$

for Fe 410 steel, $f_u = 410 \text{ N/mm}^2$, $f_y = 250 \text{ N/mm}^2$

1500)

for a lap joint, the bolts will be in single shear and assuming that the threads intercept the shear plane, $n_1 = 1$, $n_2 = 0$

design strength of a bolt in shear

$$V_{d,b} = \frac{V_{ns,b}}{\gamma_{mb}} = \frac{1}{\gamma_{mb}} \left[\frac{f_{ub}}{1.3} (n_1 A_{nb} + n_2 A_{sb}) \right]$$

$$= \frac{1}{1.25} \left[\frac{400}{1.3} (1 \times 215) \right]$$

$$= 95.26 \text{ kN}$$

design strength of a bolt in bearing against thinner plate :-

$$V_{d,pb} = \frac{V_{npb}}{\gamma_{mb}}$$

$$V_{npb} = 2.5 k_b d t f_u, \text{ Assuming } e = 40 \text{ mm}$$

$$k_b = \begin{cases} \text{(i)} \frac{e}{3d_0} = \frac{40}{3 \times 22} = 0.606 \\ \text{(ii)} \frac{f}{3d_0} - 0.25 = \frac{60}{3 \times 22} - 0.25 = 0.66 \\ \text{(iii)} \frac{f_{ub}}{f_u} = \frac{400}{410} = 0.976 \\ \text{(iv)} 1.0 \end{cases}$$

$$\text{least} = 0.606$$

$$\text{so, } k_b = 0.606$$

$$\text{Vdfo} = \frac{2.5 \times 0.606 \times 20710 \times 410}{1.25} = 99.38 \text{ kN}$$

design strength of a bolt = min of shear or


bearing or bolt value = 95.26 kN

no. of bolts reqd to transmit a load of 120 kN

$$n = \frac{120}{95.26} = 2.65 \approx \text{say } 3 \text{ nos}$$

(i) when each flat is 100 mm wide.

The bolts are to be arranged along the length in a row because width is not sufficient to accommodate them in a row along the width.

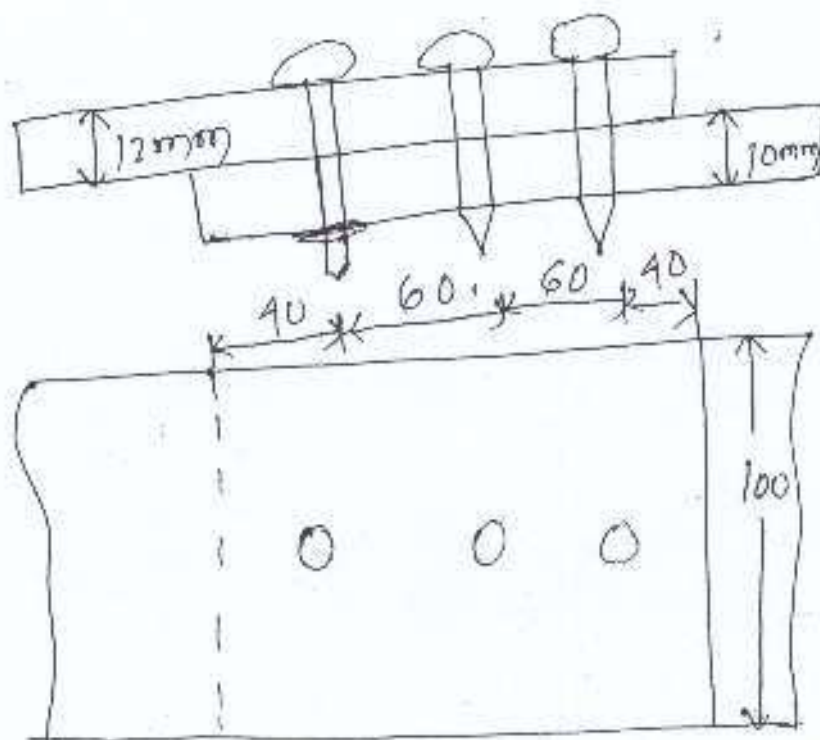

check for rupture strength of the plate

$$b = 100, n = 1$$

$$T_{dn} = \frac{0.9 A_n f_u}{\gamma_{m2}} \quad , \quad A_n = (b - n d_0) t$$


$$= (100 - 1 \times 22) 10 = 780 \text{ mm}^2$$

$$T_{dn} = \frac{0.9 \times 780 \times 110}{1.25} = 230.26 \text{ kN} > 120 \text{ kN}$$

230.26 kN > 120 kN (Hence safe)

(ii) when each flat is 200 mm wide

To reduce the length of the joint, the bolts may be arranged along the width in a row.

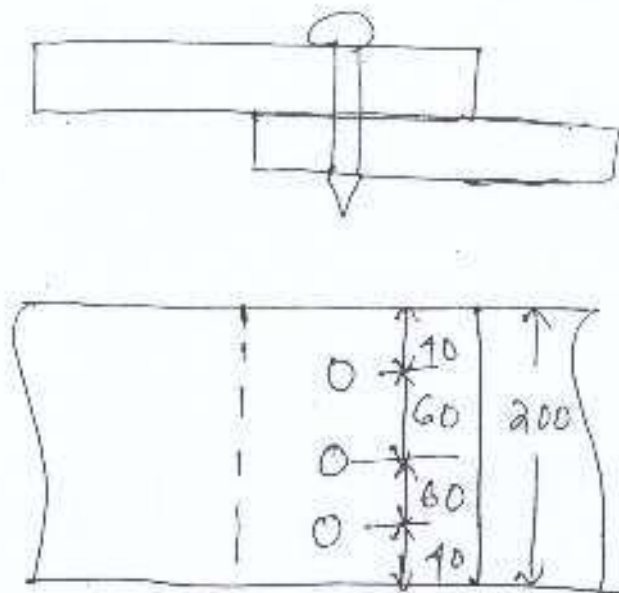

Check for rupture strength of the plate

Design strength of the plate (T_{dn})

$$T_{dn} = \frac{0.9 A_n f_y}{\gamma_{mt}} = \frac{0.9 \times 1390 \times 110}{1.25}$$

= 395.52 kN > 120 kN (Hence ok)

Welded Connection

Welded consist of joining two pieces of metal by establishing a metallurgical bond between them through the application of pressure or through fusion.

→ In other words, welding is a method of connecting two pieces of metal by heating to a plastic or fluid state.

Types of weld and welded joints

The basic types of welded joints are classified depending upon the types of weld. There are 3 types of welds

- (1) Butt weld
- (2) fillet weld
- (3) slot weld & plug weld

Butt weld



This is also known as groove weld. Butt welds are provided when the members to be joined are placed end to end or aligned in the same plane.

→ depending upon the shape of the groove made for welding, various types of groove welds are listed as follows.

Fillet weld


Fillet welds are provided when two members to be joined are in different planes.

Fillet weld is a weld of approximately triangular cross-section joining two surfaces nearly at right angles to each other in lap, tee or corner types of joint.

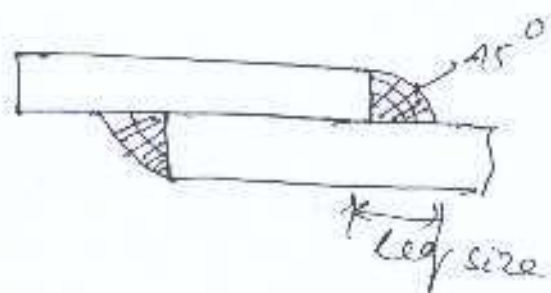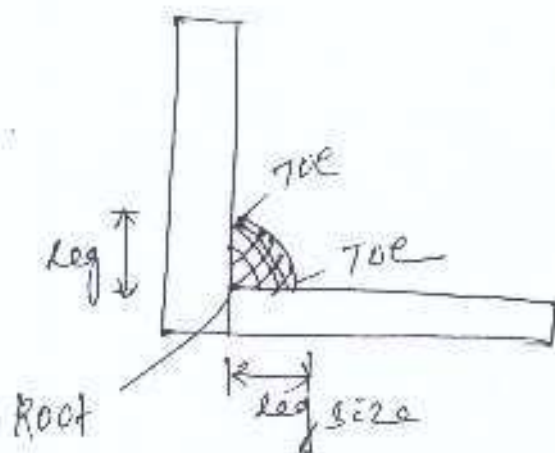


→ When the cross-section of fillet weld is isosceles triangle with face at 45° , it is called as standard fillet weld.


→ In special circumstances 30° & 60° angles may be used. Depending upon the shape of weld face, a fillet weld is known as concave fillet weld, convex fillet weld or as mitre fillet weld.



(a) concave



(b) convex




(c) mitre

Slot and Plug welds

slot and plug welds are used to supplement the fillet welds, when the reqd length of fillet weld can not be provided.

The penetration of these welds into base metal is difficult to ascertain and the inspection of these welds is difficult.

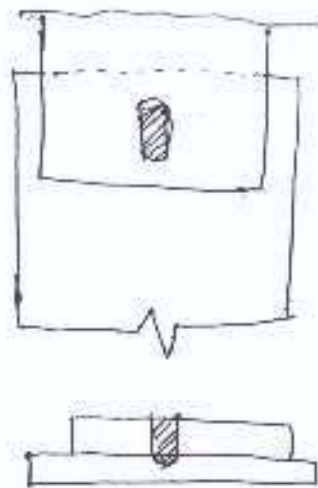

Advantages of welded connections

- (1) welding is more adaptable than bolting or riveting, as even circular sections can be easily connected by welding.
2. Full strength of a joint can be developed i.e. 100% efficiency can be achieved in contrast to bolted or rivetted connection which can reach a max^m of (70-80)% efficiency.
3. Since there is no deduction for holes, the gross section is effective in carrying loads and there is no problem of mismatching.
4. Better resistance against fatigue, impact load.
5. Results in lighter structures, due to absence of connecting plates, gusset plates etc.
6. noise pollution is nearly eliminated.
7. Presents good aesthetic appearance.
8. connections are watertight & airtight.

Disadvantages of welded connections

1. Skilled labour & electricity is necessary for welding.
2. due to uneven heating and cooling, internal stresses and warping develops.
3. welded joints are more brittle & their fatigue strength is less.

I.S. Code Provisions for Welding

Butt weld

1) Reinforcement :-

- 1) size of butt weld shall be specified by the throat thickness - In double 'U', double 'V', double 'J' butt welds, which give complete penetration of welding. size of butt weld shall be taken as thickness of thinner plate connected.
- 2) In case of incomplete penetration of welding effective throat thickness = min^m thickness of weld metal.
- 3) In absence of appropriate data,
throat thickness = $\frac{5}{8}$ th of thickness of thinner material
- 3) Effective length of butt weld = length of full size weld
- 4) min^m length of weld
= 4 x size of weld

(5) for intermittent butt weld,

effective length $\geq 4 \times$ size of weld

Space b/n two welds $< 16 \times$ thickness of thinner plate

Fillet weld

(1) Size

(a) The size of normal fillet weld shall be taken as the min^m weld leg size.

(b) for deep penetration weld with not less than 2.4mm
Size of weld = min^m leg size + actual penetration

(2) min^m size of weld = 3mm

(It is provided to avoid risk of cracking)

Plate thickness

min^m size of weld

$< 10\text{mm}$	3mm
10-20mm	5mm
20-32mm	6mm
32-50mm	8mm

* The min^m size of fillet weld should be 1.5mm less than the nominal thickness of the edge.

(3) Effective throat thickness

= $> 3\text{mm}$ & $< 0.7t$ or t

The throat of a fillet is the length of perpendicular from the right angle corner to the hypotenuse.

$$\text{Throat thickness} = K \times \text{fillet size}$$


Angle b/w fusion faces	60-90°	91-100	101-106	107-113	114-120
Constant K	0.7	0.65	0.60	0.55	0.50

(4) Effective length

The effective length of a fillet weld is equal to its overall length minus twice the weld size. The effective length of a fillet weld designed to transmit load should not be less than 4s.

(5) End return

The fillet weld terminating at the end or side of a member should be returned around the corner when-ever practicable for a distance not less than twice the weld size.

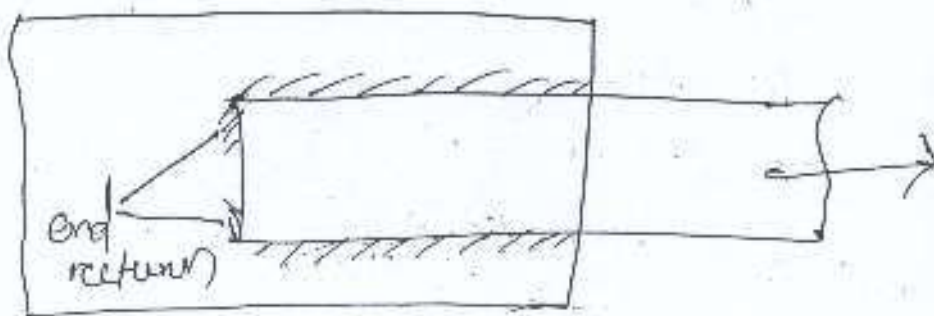

(6) Over lap

The min^m lap in a lap joint should not less than 4t or 40mm, which ever is more.

Plug and slot welds

(i) size

- ① width or diameter should be not less than 3t or 25 mm whichever is more.
- ② corner radius in slotted hole should not be less than 1.5t or 12 mm whichever is greater.

(ii) spacing

spacing should be at or 25 mm which is more.

design stresses & design strength of welds

fillet weld, slot or plug weld :-

$$\text{design strength of weld } f_{wd} = \frac{f_{wn}}{\gamma_{mw}}$$

where,

f_{wn} = nominal strength of the fillet weld

$$f_{wn} = \frac{f_y}{\sqrt{3}}$$

Butt weld

$$\text{design stress of the butt weld } f_{dw} = \frac{f_y}{\gamma_{mw}}$$

design stress of butt weld in shear is given by

$$2d_w = \frac{f_{yw}}{\sqrt{3} \gamma_{mw}}$$

Problem

A steel plate $200\text{mm} \times 12\text{mm}$ is welded to a 10mm thick gusset plate such that the overlap of the members is 250mm . If fillet weld of size 6mm is used for the connection, determine the design strength of the joint. Given that shop welding is to be done on three sides & grade of steel is Fe 410.

Given data


for Fe 410 grade steel

$$f_u = 410 \text{ N/mm}^2$$

$$f_y = 250 \text{ N/mm}^2$$

for shop welding

$$\gamma_{mw} = 1.25$$

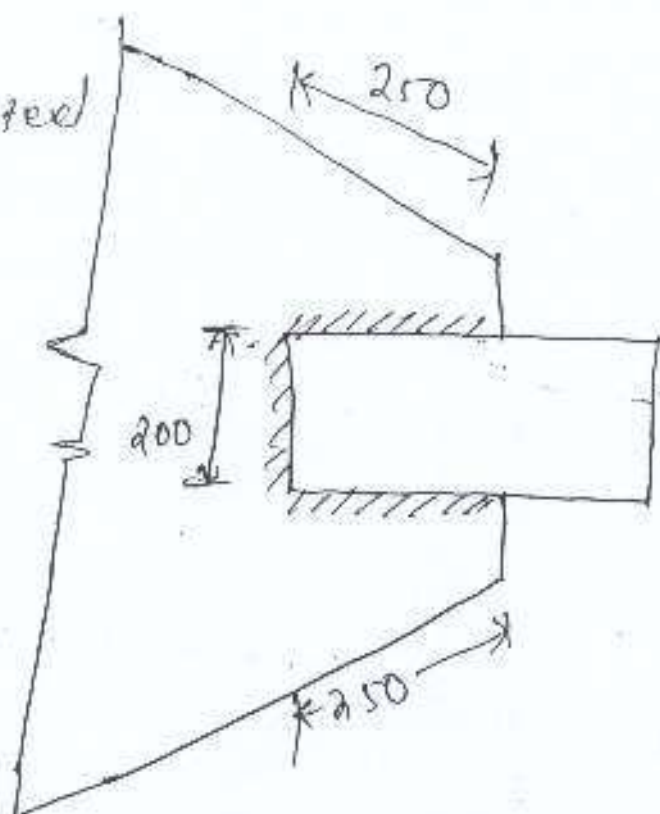

Soln

Effective length of the weld (l_w)

$$= 2 \times 250 + 200 = 700 \text{ mm (Assuming end return)}$$

Effective throat thickness $t_e = k_s = 0.7 \times 6 = 4.2 \text{ mm}$

$$\text{design strength of the weld } P_{dw} = l_w t_e \frac{f_u}{\gamma_{mw}}$$

$$= 700 \times 4.2 \times \frac{410}{1.25} = 556.75 \text{ kN}$$

design strength of the plate

$$A_g = b \times t = 200 \times 12 = 2400 \text{ mm}^2$$

strength of the plate on yielding


$$T_{dy} = \frac{A_g f_y}{\gamma_{mo}} = \frac{200 \times 12 \times 250}{1.1} = 545.45 \text{ kN}$$

Strength of the joint = min^m of weld or plate strength

$$= 545.45 \text{ kN}$$

Problem

Determine the service load that can be transmitted through the connection shown in the fig. Assume fillet welding & Fe 410 grade steel.

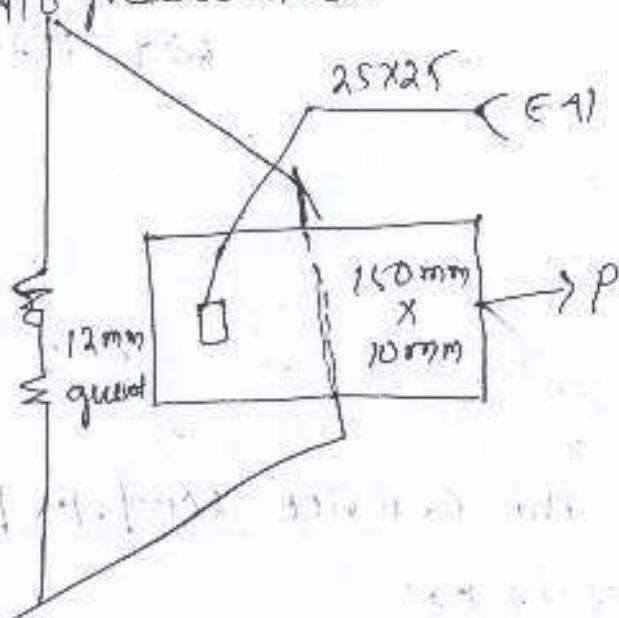

Given data

base electrode E 41

$$f_y = 330 \text{ mpa}$$

$$f_u = 410 \text{ to } 510 \text{ N/mm}^2$$

$$f_{uw} = 410 \text{ N/mm}^2, f_y = 250 \text{ N/mm}^2$$

Solⁿ

$$\text{design strength of fillet weld, } P_{dw} = L_w k_e \frac{f_y}{\gamma_{mw}}$$

$$= \frac{400 \times 3.5 \times 110}{13 \times 1.5} = 220.93 \text{ kN}$$

$$\text{design stress of plug weld } f_{wd} = \frac{f_u / f_3}{\gamma_{mw}}$$

$$= \frac{410}{13 \times 1.5} = 157.81 \text{ N/mm}^2$$

$$\text{Area of the plug weld} = 25 \times 25 = 625 \text{ mm}^2$$

$$\text{design strength of plug weld} = 625 \times 157.81 = 98.63 \text{ kN}$$

$$\text{total design strength} = \dots$$

$$= 265.12 + 98.63 = 363.75 \text{ kN}$$

Strength of the plate

$$T_{df} = \frac{A_g f_y}{\gamma_{m0}} = \frac{150 \times 10 \times 250}{1.1} = 340.91 \text{ kN}$$

$$\text{If } P \text{ is the service load, } 1.5 P = 340.91 \text{ kN or}$$

$$P = 227.27 \text{ kN}$$

design procedure for butt weld

In case of complete penetration, butt weld design calculations are not reqd.

design procedure for fillet weld

1. size of the weld is selected based on the thickness of the members to be joined
2. depending on the angle b/w fusion faces, the effective throat thickness is calculated.
3. if force to be transmitted is not given, design strength should be taken as the rupture strength
4. strength of the weld per mm length is calculated.
5.
$$l_e = \frac{\text{strength of weld per mm}}{\text{factored load}}$$
6. Length of weld arranged suitably
7. check for minm lap of the joint
8. End returns of length equal to twice the size of the weld at each end of the longitudinal fillet weld ~~are~~ provided.

Problem

design a suitable fillet weld to connect a tie bar 60mm x 8mm to a 12mm thick gusset plate so as to develop maxm force if (i) shop welding is done on two sides & (ii) fillet weld is done on three sides.

Given data

Grade of steel Fe 410, $f_u = 410 \text{ N/mm}^2$, $f_y = 250 \text{ N/mm}^2$
for 12mm thick gusset plate,
minm size of weld = 5mm
for 8mm thick tie bar
maxm size of weld = $8 - 1.5 = 6.5 \text{ mm}$

Hence let us provide a weld size $t_1(t) = 6\text{mm}$ with 90° fusion faces

$$\text{Effective throat thickness } (t_e) : 0.7t = 0.7 \times 6 = 4.2\text{mm}$$

To develop max force, the design strength of weld be equal to strength of the plate

Strength of the plate on yielding

$$T_{d1} = \frac{A_g f_y}{\gamma_{m0}} = \frac{60 \times 8 \times 250}{1.1} = 109.09 \text{ kN}$$

(i) For shop welding on two sides, partial safety factor

$$\gamma_{mw} = 1.25$$

Strength of the weld per mm length

$$= \frac{L_w t_e f_u / \gamma_3}{\gamma_{mw}} = \frac{1 \times 4.2 \times 410 / \gamma_3}{1.25} = 795.66 \text{ N/mm} \\ = 0.795 \text{ kN/mm}$$

$$\text{Effective length of weld reqd} = \frac{109.09}{0.795} = 137.22 \text{ mm} \\ \approx 140 \text{ mm}$$

$$\text{Length of weld on each side} = 140/2 = 70 \text{ mm}$$

$$\nless b = 60 \text{ mm (transverse spacing)}$$

$$\nless 4c = 4 \times 6 = 24 \text{ mm}$$


$$\text{min. Lap} = 4 \times t_{\text{min}} = 4 \times 8 = 32 \text{ mm or } 40 \text{ mm}$$

$$\text{which is more} = 40 \text{ mm}$$

Hence provide 6mm size & 70mm long shop fillet weld on both sides of the plate with end return of $2 \times 6 = 12 \text{ mm}$

$$\therefore \text{length on each side} = 70/2 \times 2 = 94 \text{ mm}$$

$$\text{total length} = 94 \times 2 = 188 \text{ mm}$$

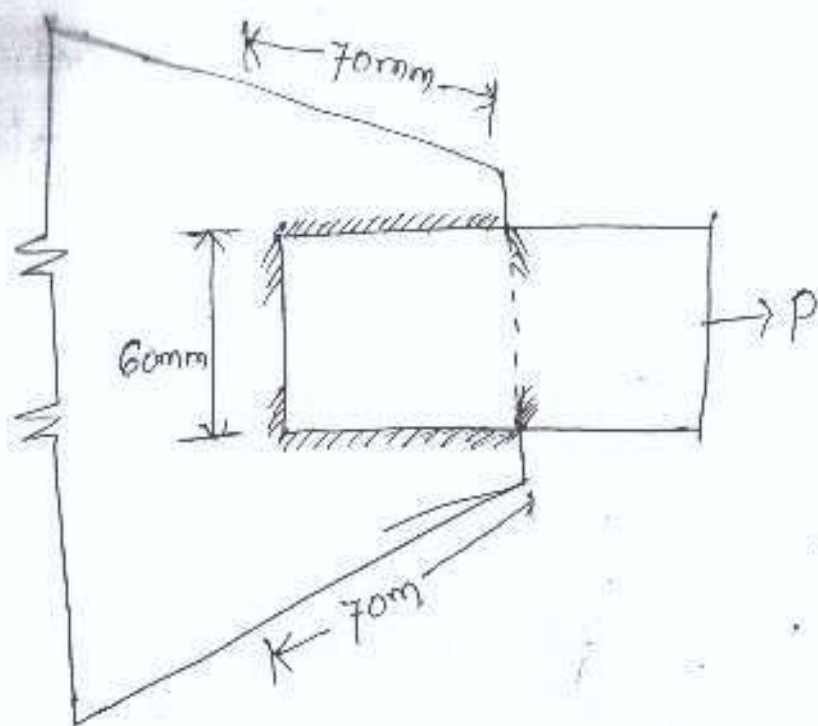

(ii) fore field welding on three sides

partial safety factor $\gamma_{mw} = 1.5$

strength of the weld per mm length

$$= \text{weld } \frac{f_y / \gamma_s}{\gamma_{mw}} = 1 \times 1.2 \times \frac{410 / \sqrt{3}}{1.5} = 0.663 \text{ kN/mm}$$

$$\therefore \text{Effective length of weld reqd} = \frac{109.09}{0.663} = 164.5 \text{ mm} \approx 165 \text{ mm}$$

$$\phi 45 = 4 \times 6 = 24 \text{ mm (ok)}$$

Length of the end weld = 60 mm

Length of the weld reqd on both the sides


$$= 165 - 60 = 105 \text{ mm}$$

Length weld reqd on each side

$$= 105 / 2 = 52.5 \text{ mm} \approx 55 \text{ mm}$$

$$\phi \text{ min lap } \phi 1 \times 1 \text{ min} = 1 \times 8 = 32 \text{ mm} \& \phi 40 \text{ mm}$$

Hence let us provide a lap of 55 mm & 6 mm size shop weld on three sides with end return of $2 \times 6 = 12$ mm
 \therefore total length = $60 + 2 \times 55 + 2 \times 12 = 194$ mm

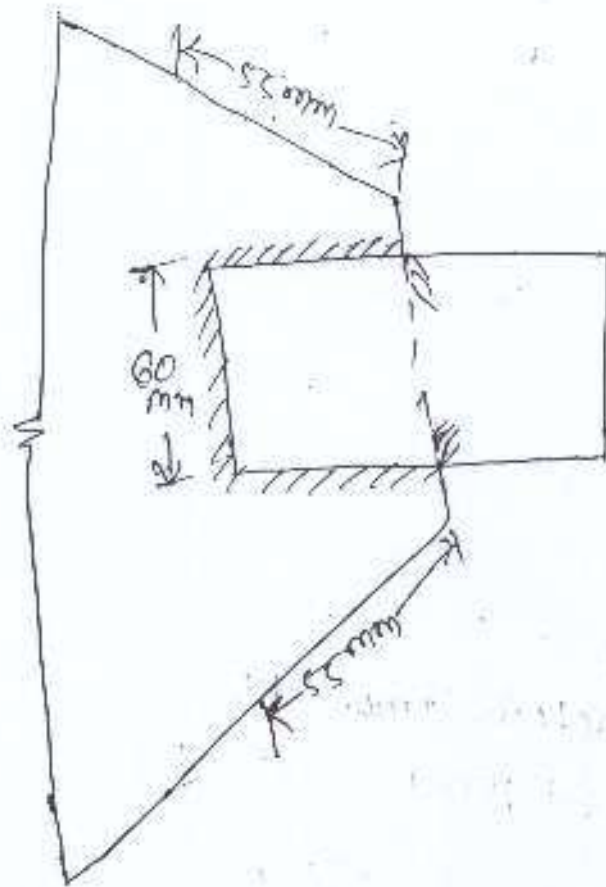

Tension Members

Tension members are linear members predominantly subjected to pulling which tend to stretch/elongate the members.

→ Tension members in a truss is known as tie.

Common shapes of tension members

Design strength of a tension member

Design strength of a tension member is the lowest of the following:-

- (i) Design strength due to yielding of gross secⁿ (T_{dy})
- (ii) Rupture strength of the critical secⁿ (T_{dr})
- (iii) Block shear strength (T_{db})

design strength due to yielding of gross secⁿ (T_{dg})

$$T_{dg} = \frac{A_g f_y}{\gamma_{m0}}$$

where,

f_y = yield stress of the material

A_g = gross area of the c/s

γ_{m0} = partial safety factor for failure in tension by yielding = 1.1

design strength due to rupture of critical secⁿ (T_{dn})

For Plates

$$T_{dn} = \frac{0.9 A_n f_u}{\gamma_{m2}}$$

where,

γ_{m2} = partial safety factor = 1.25

A_n = net effective area

$$= \left[b n d_0 + \sum \frac{r_{si}^2}{A_{gi}} \right] t$$

b = width of the plate

d_0 = dia of bolt hole

g = gauge length

(b) For threaded rods

$$T_{dn} = 0.9 A_n f_u / \gamma_{me}$$

(c) Single angle

An angle connected through one leg is affected by shear lag and the effectiveness of outstanding leg reduces.

$$\text{Rupture strength } (T_{dn}) = \frac{0.9 A_{nc} f_u}{\gamma_{me}} + \frac{\beta A_{go} f_y}{\gamma_{mo}}$$

where,

A_{nc} = Net area of connected leg

A_{go} = Gross area of outstanding leg

$$\beta = 1.4 - 0.076 \left(\frac{e_0}{t} \right) \left(\frac{f_y}{f_u} \right) \left(\frac{b_s}{L_c} \right)$$


where,

e_0 = outstanding leg width

b_s = shear lag width

L_c = length of end connection


t = thickness of leg

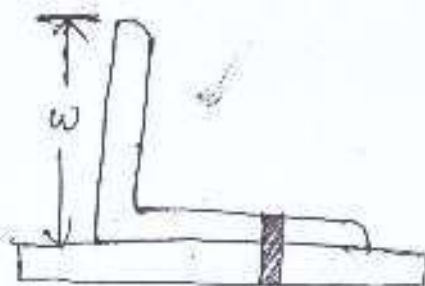

$k_1 = w_1$

$$k_s = w_1 + w_2 - t$$

(Bolted connect)

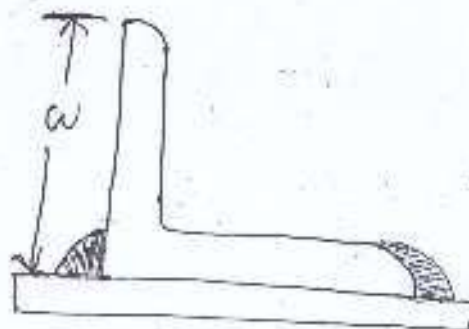

$$k_s = w$$

(welded connect)

(b) for threaded rods

$$T_{dn} = 0.9 A_n f_u / \gamma_{m2}$$

(c) single angle

An angle connected through one leg is affected by shear lag and the effectiveness of outstanding leg reduces.

$$\text{Rupture strength } (T_{dn}) = \frac{0.9 A_{nc} f_u}{\gamma_{m2}} + \frac{\beta A_{go} f_y}{\gamma_{m0}}$$

where,

A_{nc} = net area of connected leg

A_{go} = Gross area of outstanding leg

$$\beta = 1.4 - 0.076 \left(\frac{w}{t} \right) \left(\frac{f_y}{f_u} \right) \left(\frac{b_s}{2L} \right)$$


where,

w = outstanding leg width

b_s = shear lag width


L = length of end connection

t = thickness of leg

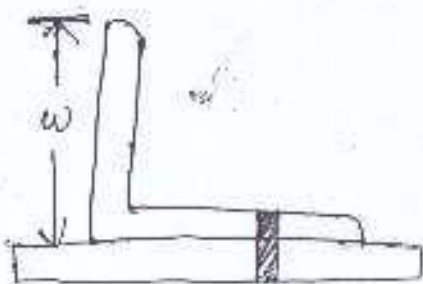

$$b_s = w + w_1 - t$$

(Bolted connectⁿ)

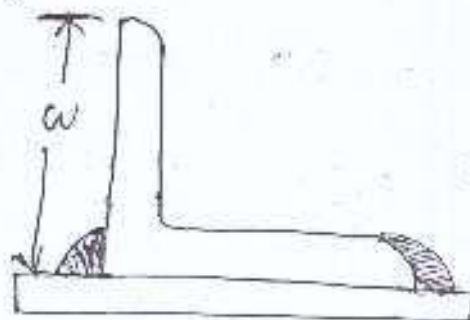

$$b_s = w$$

(welded connectⁿ)

for preliminary sizing, the rupture strength of net section may be approximately taken as

$$T_{dn} = \frac{\alpha A_n f_u}{\gamma_{m2}}$$

where $\alpha = 0.6$ for one or two bolts
 $= 0.7$ for three bolts
 $= 0.8$ for four or more bolts

design strength due to block shear

(i) for shear yield & tension fracture

$$T_{db1} = \frac{A_{vg} f_y}{1.3 \gamma_{m0}} + 0.9 \frac{A_{tn} f_u}{\gamma_{m1}}$$

(ii) for tension yield and shear fracture

$$T_{db2} = \frac{A_{tg} f_y}{\gamma_{m0}} + 0.9 \frac{A_{tn} f_u}{1.3 \gamma_{m1}}$$



where,

A_{vg} & A_{vn} = min^m gross & net areas

A_{tg} & A_{tn} = min^m gross & net areas

Block shear failure

At the connected end, failure of tension members may occur along a path involving shear along one plane & tension on perpendicular plane along the fasteners. This type of failure is known as block shear failure.

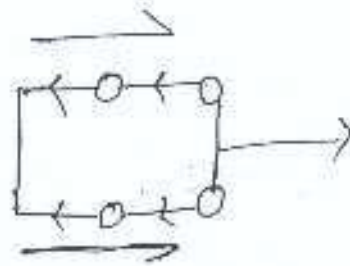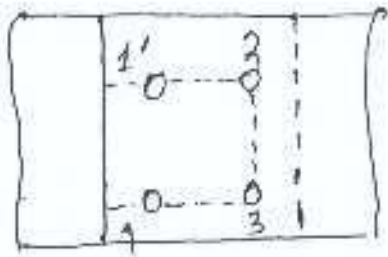

Slenderness Ratio (λ)

The effective slenderness ratio of a tension member is the ratio of its effective length (KL) to its least radius of gyration.

Design of tension members subjected to axial load

The following procedure may be adopted in the design of axially loaded tension members.

1. The gross area A_g reqd to carry the factored load T_u from consideration of yielding is given by

$$A_g = \frac{T_u}{f_y / \gamma_{mo}}$$

$$A_g = \frac{1.1 T_u}{f_y}$$

2. Select suitable shape of secⁿ depending upon the type of structure & location of member such that gross area is (25 to 40)% more than calculated A_g .
3. determine the no. of bolts on the welding reqd & arranged.
4. find the strength considering
 - (1) strength in yielding
 - (2) " " Rupture
 - (3) Block shear

5. Check of the strength is more than external factored tensile force
6. Check for slenderness ratio from table-3 IS 800:2007

Problem

A tension member is to carry a factored load of 250 kN. design a suitable plate steel for it assuming the connection to consist of lap joint with bearing type bolts of property class 4.6. Given grade of structural steel is Fe 410 & the effective length of the member is 0.75 m. Subject to possible reversal of stress due to earthquake

Given data

for steel grade Fe 410, $f_u = 410 \text{ N/mm}^2$, $f_y = 250 \text{ N/mm}^2$
 $\gamma_{mo} = 1.1$, $\gamma_{m2} = 1.25$

Solⁿ

(1) Calculation of sectional area reqd
 Net area reqd on the basis of rupture of critical secⁿ

$$A_n = \frac{\gamma_{m2}}{0.9 f_u} = \frac{250 \times 10^3 \times 1.25}{0.9 \times 410} = 846.88 \text{ mm}^2$$

Assuming 25% excess, gross area $A_g = 1.25 \times 846.88 = 1058.60 \text{ mm}^2$

Gross area reqd on the basis of gross secⁿ yielding

$$A_g = \frac{\gamma_{mo}}{f_y} = \frac{250 \times 10^3 \times 1.1}{250} = 1100 \text{ mm}^2$$

Hence let us provide a plate of 140 mm x 8 mm, giving

(ii) from unwin's formula, dia of bolt $\phi = 6\sqrt{t}$

$$\phi = 6\sqrt{8} = 16.97 \text{ mm}$$

Hence let us provide single row bolts of 16mm dia, $\phi = 16 \text{ mm}$

$$\phi_0 = 18 \text{ mm}, \sigma_{mb} = 125, A_{mb} = 157 \text{ mm}^2, A_{sb} = 201 \text{ mm}^2$$

$$f_{ub} = 400 \text{ N/mm}^2$$

Assuming the shear plane, $n_n = 1, n_s = 0$, assuming
 $\beta_{ti}, \beta_{ey}, \beta_{pk} = 1$

$$V_{db} = \frac{f_{ub}}{1.3 \sigma_{mb}} (n_n A_{mb} + n_s A_{sb})$$

$$= \frac{400}{1.3 \times 125} (1 \times 157) = 29.01 \text{ kN}$$

Strength of a bolt in bearing

Assuming $e = 30 \text{ mm}, p = 40 \text{ mm}$

$$k_b = \text{least of } \left\{ \begin{array}{l} \frac{e}{3\phi_0} = \frac{30}{3 \times 18} = 0.555 \\ \frac{p}{3\phi_0} - 0.25 = 0.991 \\ \frac{f_{ub}}{f_u} = \frac{400}{410} = 0.976 \\ 1.0 \end{array} \right.$$

$$\text{So } k_b = 0.491$$

$$V_{db} = \frac{2.5 k_b \phi f_u}{\sigma_{mb}} = \frac{2.5 \times 0.491 \times 16 \times 8 \times 410}{125}$$

$$\therefore \text{Bolt value} = 209.01 \text{ kN}$$

$$\therefore \text{NO of bolts reqd} = \frac{250}{209.01} = 8.62 \approx 10$$

Hence let us provide 16mm dia bolts in 2 rows


Check for long joints

l_j = distⁿ b/w the first & last rows of bolts in the joint.

$$= 4 \times 40 = 160 \text{ mm} < 1.5d = 1.5 \times 16 = 240 \text{ mm (OK)}$$

(i) Net section in rupture

Here $p_{si} = 0, n = 2$

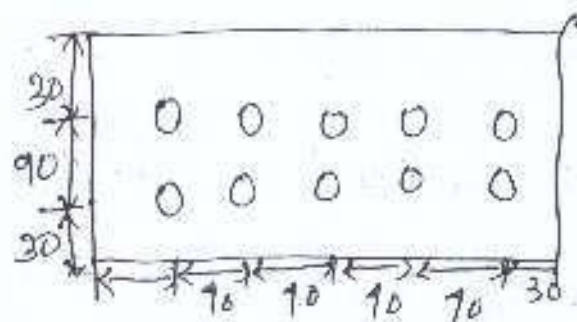

$$A_n = \left[b - n d_0 + \sum \frac{p_{si}^2}{4s_i} \right] t$$

$$= [140 - 2 \times 16 + 0] \times 8 = 832 \text{ mm}^2 < 876.88 \text{ mm}^2$$

Hence let us revise the secⁿ, to 150 mm x 8 mm, giving

$$A_g = 1200 \text{ mm}^2$$

$$A_n = (150 - 2 \times 16 + 0) \times 8 = 912 \text{ mm}^2 > 876.88 \text{ mm}^2 \text{ (OK)}$$

$$T_{dn} = \frac{0.9 f_u A_n}{\gamma_{mf}} = \frac{0.9 \times 410 \times 912}{1.25} = 269.222 \text{ kN}$$

(ii) Gross secⁿ yielding


$$T_{dg} = \frac{A_g f_y}{\gamma_{mo}} = \frac{1200 \times 250}{1.1} = 272.727 \text{ kN} > 250 \text{ kN}$$

(m) strength of the plate against block shear

The shaded portion of the plate may shear off

Gross area in shear,

$$A_{vg} = 2(2 \times 40 + 30) \times 8 = 3040 \text{ mm}^2$$

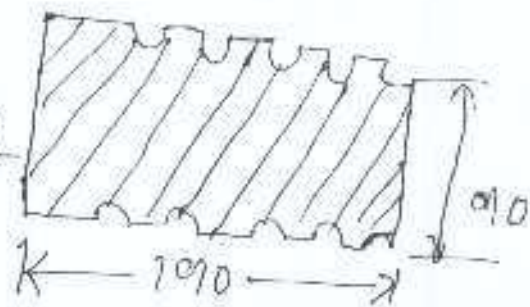

net area in shear, A_{vn}

$$A_{vn} = 2 \left[(2 \times 40 + 30) - \left(4 + \frac{1}{2} \right) \times 18 \right] \times 8 = 1714 \text{ mm}^2$$

Gross area in tension, $A_{tg} = 90 \times 8 = 720 \text{ mm}^2$

net area in tension, $A_{tn} = (90 - 2 \times \frac{1}{2} \times 18) \times 8 = 576 \text{ mm}^2$

for tension yield & shear failure (T_{db1})

$$T_{db1} = \frac{A_{vg} f_y}{1.3 \gamma_{mo}} + 0.9 \frac{A_{tn} f_u}{\gamma_{ml}}$$

$$= \frac{3040 \times 250}{1.1 \times 1.3} + 0.9 \times \frac{576 \times 410}{1.25}$$

$$= 460.872 \text{ kN}$$

for tension yield & shear fracture

$$T_{db2} = \frac{A_{tg} f_y}{\gamma_{mo}} + 0.9 \frac{A_{vn} f_u}{1.3 \gamma_{ml}}$$

$$= \frac{720 \times 250}{1.1} + 0.9 \times \frac{1714 \times 410}{1.3 \times 1.25} = 460.872 \text{ kN}$$

strength against block shear = 460.872 kN > 250 kN

(1) Check for slenderness ratio

min^m radius of gyration, $r = \sqrt{\frac{I}{A}}$

$$= \sqrt{\frac{bt^3/12}{bt}} = \frac{8}{\sqrt{12}} = 2.309 \text{ mm}$$

Effective length $KL = 0.75 \text{ m (given)} = 750 \text{ mm}$

max^m slenderness ratio $\lambda = \frac{KL}{r}$


$$\frac{750}{2.309} = 324.8235 \text{ mm}$$

\therefore Hence design ok

Compression Members

Many structural members are in compression. Vertical compression members in buildings are called columns & compression members in trusses are called struts.


Common shapes



(a) single angle



(b) double angle




(c) Tee




(d) channel




(e) circular hollow sec?



(f) Rectangular Hollow sec?



(g) I-sec?

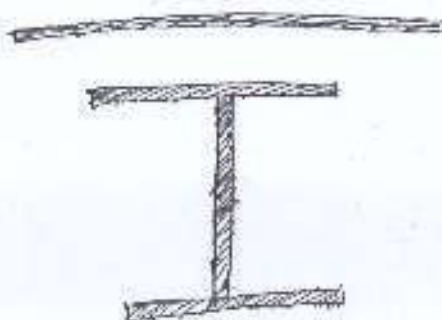

Buckling class of cross sec?

It is a common practice to transfer load axially through any member. But due to some imperfection, unexpected eccentricity may be imposed.

→ Buckling is defined as the sudden bending, warping or crumpling of the compression member under compression.

→ due to buckling, deformation developed in a column occurs in a direction or plane normal to the direction of the loading.



Slenderness Ratio (λ)

It is defined as the ratio of effective length to the corresponding radius of gyration of the sec?

$$\lambda = \frac{kL}{r_e}$$

design compressive stress & strength

The design compressive strength of a member is given by

$$f_{cd} = \frac{f_y / \gamma_{m0}}{\phi + [\phi^2 - \lambda^2]^{0.5}}$$

where,

$$\phi = 0.5 (1 + \alpha (\lambda - 0.2) + \lambda^2)$$

$$\lambda = \sqrt{f_y / f_{cc}} = \left(\frac{kL}{r} \right)^2 f_y / \pi^2 E$$

f_{cd} : design compressive stress

α : imperfection factor

Imperfection factor

Buckling class	a	b	c	d
α	0.21	0.31	0.19	0.75

design compressive strength $P_d =$

$$P_d = A_e f_{cd}$$

Problem

calculate factored axial load on the column sec?
ISHB 400 @ 806.38 N/m. The height of the column is
3.0 m and it is pin-ended. Use steel of Fe 410 grade.

(1) for steel grade Fe410

$$f_y = 250 \text{ N/mm}^2, \gamma_{m0} = 1.1, E = 2 \times 10^5 \text{ N/mm}^2$$

(2) For IHB 400 @ 806.38 N/m (from code book)

$$h = 400 \text{ mm}, b_f = 250 \text{ mm}, t_f = 12.7 \text{ mm}, t_w = 10.6 \text{ mm}$$

$$A = 10466 \text{ mm}^2, r_{zz} = 166.1 \text{ mm}, r_{yy} = 57.6 \text{ mm}$$

(for)

(3) Buckling class

$$\frac{h}{b_f} = \frac{400}{250} = 1.6 > 1.2, t_f = 12.7 \text{ mm} \leq 40 \text{ mm}$$

\therefore Buckling class about z-z axis = a, about y-y axis = b

(4) Effective sectional Area

$$A_e = A = 10466 \text{ mm}^2$$

(5) Effective length of columns

for column pinned at both ends, $K_2 = 1.0$

(6) Check for limiting thickness by comparing with semi-compact section parameters.

Here, root radius $R_1 = 11 \text{ mm}$

$$b = \frac{b_f}{2} = \frac{250}{2} = 125 \text{ mm}$$

$$d = h - 2(t_f + R_1)$$

$$d = 400 - 2(12.7 + 11) = 346.6 \text{ mm}$$

$$E = \sqrt{\frac{250}{f_y}} = \sqrt{\frac{250}{250}} = 1$$

for rolled section, outstanding of compression flange (ii)

$$\frac{b}{t} = \frac{125}{12.7} = 9.84 < 10.56 = 10.56 \text{ (class 2, compact)}$$

$$< 15.76 = 15.76 \text{ (class 3, semi-compact)}$$

$$< 31.6 = 31.6 \text{ (class 1, plastic)}$$

Hence the secⁿ is not slender & full secⁿ is available for design strength.

(7) design compressive strength

(i) About y-y axis

$$\lambda_y = \frac{KL}{r_{yy}} = \frac{1.0 \times 3000}{51.6} = 58.14 < 180$$

for $f_y = 250 \text{ N/mm}^2$ & buckling class 'b'

By interpolation

KL/r	f_{cd}
50	191
58.14	?
60	181

$$f_{cd} = 191 - \left[\frac{(191 - 181)}{(60 - 50)} \times (58.14 - 50) \right] = 183.11 \text{ N/mm}^2$$

\therefore factored axial load $P_d = A_e \times f_{cd}$

$$= 10166 \times 183.11$$

$$= 1914.65 \text{ kN}$$

ii) About z-z axis

$$\lambda_z = \frac{KL}{r_{zz}} = \frac{1.0 \times 3000}{166.1} = 18.06 < 180$$

for $f_y = 250 \text{ N/mm}^2$ & buckling class a

By interpolation,

KL/r	f_{cd}
10	227
18.01	?
20	226

$$f_{cd} = 227 - \left[\frac{(227 - 226)}{(20 - 10)} \times (18.01 - 10) \right] = 226.2 \text{ N/mm}^2$$

$$\therefore \text{factored axial load } P_d = A_e \times f_{cd} \\ = 10466 \times 226.2 \\ = 2367.41 \text{ kN}$$

$$\therefore \text{design factored axial load} = \text{min of the two} \\ = 1919.65 \text{ kN (Ans)}$$

Design of axially loaded compression member
The following procedure may be adopted in the design of compression members.

1. Assume slenderness ratio and determine design compressive stress considering grade of steel and assuming buckling class.
2. Calculate effective sectional area reqd $A_e = P_d / f_{cd}$
Choose a trial secⁿ from steel table.
3. Find effective length & max slenderness ratio i.e.
 $\lambda_{max} = l / r_{min}$
4. Determine permissible compressive stress f_{cd}
5. Redesign if P_d differs considerably from the design load.

6. The section may be checked for limiting thickness also.

Problem

Design a column section (using channel secⁿ only) to carry a factored axial load of 400 kN. The column is 4m long & is effectively held in position at both ends but restrained against rotation at one end only. Consider $f_y = 250 \text{ N/mm}^2$. Assume earthquake actions.

Solⁿ

(1) Assuming permissible design compressive stress 80 N/mm^2

$$A_{req} = \frac{400 \times 10^3}{80} = 5000 \text{ mm}^2$$

(2) Try 2 MC 350 @ 413 N/m, having $A = 5366 \text{ mm}^2$ (from steel table)

$$r_{zz} = 136.6 \text{ mm}, r_{yy} = 28.3 \text{ mm}$$

$$r_{min} = r_{yy} = 28.3 \text{ mm}$$

(3) For one end fixed & other end pinned

$$KL = 0.8L = 0.8 \times 4000 = 3200 \text{ mm}$$

$$\lambda_{max} = \frac{KL}{r_{min}} = \frac{3200}{28.3} = 113.07 < 250$$

(4) The buckling class is 'C' for channel secⁿ

$$\text{For } \frac{KL}{r} = 113.07 \text{ \& } f_y = 250 \text{ N/mm}^2$$

Permissible comp. stress $f_{cd} =$

$$f_{cd} = 91.25 \text{ N/mm}^2 \text{ (By interpolation)}$$

(5) design strength $P_d = A_e f_{cd}$

$$P_d = 5366 \times 91.25 = 489.65 \text{ kN}$$

$489.65 \text{ kN} > 400 \text{ kN}$ (Hence safe)

(6) Check for limiting thickness

$$E = \sqrt{\frac{250}{f_y}} = \sqrt{\frac{250}{250}} = 1$$

from steel table, $b_f = 100 \text{ mm}$, $h = 350 \text{ mm}$, $t_f = 13.5 \text{ mm}$
 $t_w = 8.1 \text{ mm}$, $R_1 = 14 \text{ mm}$

$$\text{Here } b = 100 \text{ mm}, d = h - 2(t_f + R_1) \\ = 350 - 2(13.5 + 14) = 295$$

$$\text{for channel sec}^n, \frac{b}{t_f} = \frac{100}{8.1} = 12.35 < 15.7 \text{ E} = 15.2$$

$$\frac{d}{t_w} = \frac{295}{8.1} = 36.42 < 42 \text{ E} = 42 \text{ (OK)}$$

Design of Steel Beams

Beams are those structural members, whose length is considerably larger than the cross-sectional dimension.

Common cross sections

For beams, angles, I-sections, channels etc are commonly used. For heavier loads I-sections with additional plates connected on flanges are used.

Classification of cross-section

During plastic analysis, it has been found that when all fibres of a beam cross-section reach yield point, then plastic hinge is formed which doesn't allow the beam to take any extra load & beam fails due to rotation about the plastic hinge.

→ But during this mechanism the beam should be capable of sufficient rotation capacity without local buckling.

→ Buckling in any small part of a member is called local buckling & buckling of whole beam is called global buckling.

→ If local buckling occurs before reaching the formation of plastic hinge then beam fails without developing full plastic moment or full rotation about plastic hinge.

→ Hence it is necessary to see that plate elements of a cross-section do not buckle locally due to compressive stresses before plastic hinges are formed.

→ Local buckling can be achieved by providing proper width to thickness ratio. Based upon this criteria beam cross-sections are divided into following 4 categories.

(1) Class-1 (Plastic cross-section)

Those are the section that can develop plastic hinges and also have full rotation capacity for failure of the structure by plastic mechanism.

(2) Class-2 (Compact) cross-section

Such section can develop plastic moment & rotation capacity in inadequate amount due to local buckling.


(3) Class-3 (Semi-compact) cross-section

These are the section in which extreme fibres in compression can reach yield stress, but can't develop the plastic moment of resistance, due to local buckling.

(4) Class-4 (Slender) cross-section

These cross-section in which the elements buckle locally even before reaching yield stress belong to this category.

consider the c/s of simply supported with UDL imposed on it.

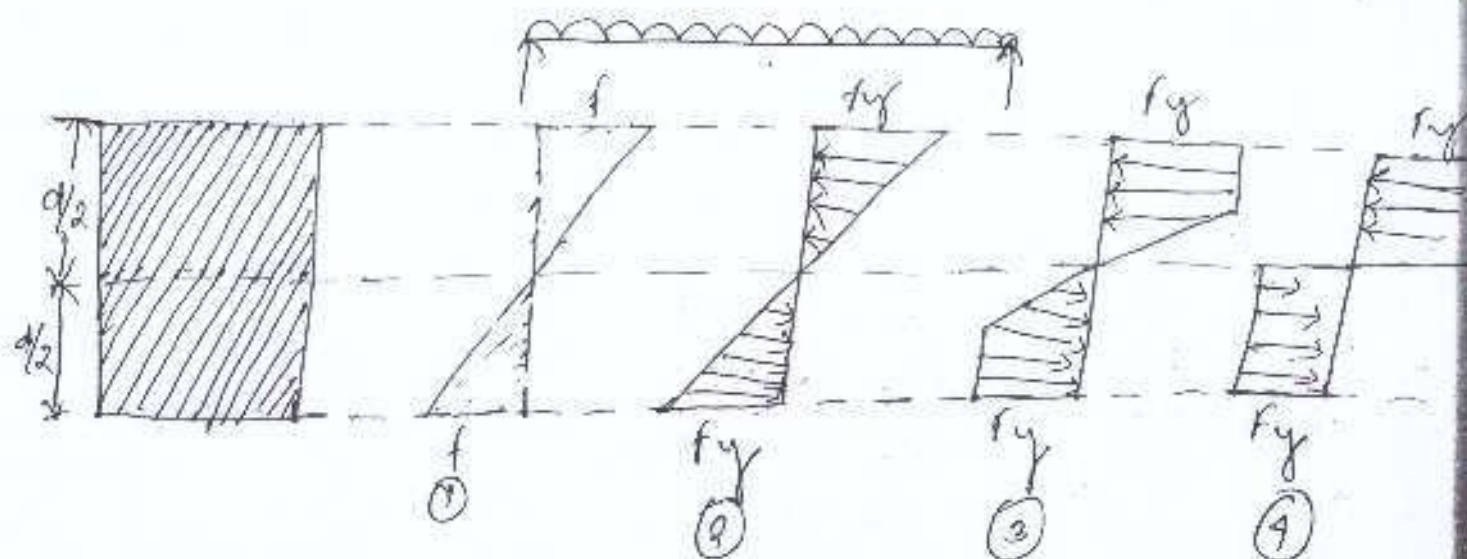

within elastic limit in f_y (1), where stress varies linearly from compression to tension.

Design of tubular structure

Introduction

The steel tubular or tubular steel sections are commonly being used as structural components and large numbers of such structures like truss member, wire plane hanger, cross branchings and beams. They are also used for scaffolding of buildings. The steel tubular sections are effectively used in large space frames, lattice structures of overalls, stadium and exhibition halls. The masts and transmission towers are the examples where tubular sections are utilized efficiently.

Classification

- Depending upon the manufacturing process, the steel tubular categorised as,
- (a) Hot finished seamless (HFS)
 - (b) Cold finished seamless (CFC)
 - (c) Hot finished welded (HFw)
 - (d) Electric resistance welded (ERW) or high frequency induction welded (HFI)

- The standard sizes, their masses/weight and relevant geometrical proportion are given table-1 of IS 1161:1998.

Designation of steel tubes:

- Steel tubes are designated by their nominal bore and shall be classified as light, medium and heavy depending upon the wall thickness.

→ They shall be graded as $Y_s + 22$, $Y_s + 25$, $Y_s + 32$ depending on their yield strength of the material.

Permissible stresses -

The magnitude of permissible stress under various loading condition as per IS 806: 2002 which are follows -

Axial stress in tension - (Table - 1 of IS 806 - 1968) may be referred

Axial stress in compression -

(Table - 2 of IS - 806 - 1968 is to be followed)

Bending stress -

Table - 3 of IS - 806 - 1968 may be followed

Shear stress -

Table - 4 of IS 806 - 1968 may be followed

Bearing stress

Table - 5 of IS 806 - 1968 may be followed.

Connection -

- connections in structures using steel tubes are provided by welding, riveting or bolting.
- connections between the tubes are made directly tube to tube without gusset plates or other attachments.
- ends of the tubes may be flattened or otherwise formed to provide for welded riveted or bolted connections.

- Generallly welding is adopted for connections in tubular steel construction, which is rigid and greater overall economical.
- Actual condition of rigidity should be taken in to consideration while designing these type of joints.
- The weld connecting two tubes ends to should be full penetration butt weld.
- The weld connecting the end of one tube (branch tube) surface of another tube (main tube) with their axis at angle of not less than 30° shall be of any one of the following.
 - (a) Butt weld throughout
 - (b) Fillet weld throughout
 - (c) Fillet butt weld, the weld being a fillet weld in one part and a butt weld in another with a continuous change from one form to the other.

Joints -

In case of all joints in compression members the ends of the members are faced for complete bearing over their whole area. The welding arc joining materials are kept sufficient to retain the members accurately in place to resist all forces other than direct compression including those arising during transport, unloading and erection.

Permissible stress in welds -

For butt weld, tensile stress = 125 N/mm^2 (for $\frac{1}{8}$ to 25)
= 150 N/mm^2 (for $\frac{1}{8}$ to 25 or $\frac{1}{8}$ to 32)

compression stress = $\sigma_t(F_c)$ (up to $\frac{1}{8}$ to 25)

shear stress = 90 N/mm^2 for $\frac{1}{8}$ to 25
= 110 N/mm^2 for $\frac{1}{8}$ to 25 or $\frac{1}{8}$ to 32

For fillet welds, shear stress = 90 N/mm^2 for $\frac{1}{8}$ to 25
= 110 N/mm^2 for $\frac{1}{8}$ to 25
or $\frac{1}{8}$ to 32

Tubular columns -

- Round tubular sections provide the most efficient cross-sectional shape for the columns and compression members having lateral restriction in all directions normal to the axis of the member.
 - The diameter of such member should be as large as possible with the additional requirement that the mean diameter to thickness ratio (d_m/t) should also be small enough to ensure that the stress failure by local buckling does not take place.
 - In design of tubular columns, two factors namely "corroding" and heat treatment.
- Effective length of compression members

Table - 7 of IS - 806 - 1968 may be followed.

Maximum

Crinkling of tubes -

→ When a steel tube is subjected to excessive compression, then the tube will have a change to crinkling, crinkling means curving in and formation of folds after the inner of the concentration of walls of tubes under compressive stress. Such folds may be circular oval or polygonal and they may occur after or before the constitutive stress reaches yield point.

→ This stress is a function of the mechanical properties of the material and of the geometrical shape of the cross section.

Mathematically,

$$\text{The stress causing collapse} = P_c = E_c \cdot t \left(\frac{m^2}{R \left(\frac{3}{m^2} - 1 \right)} \right)^{1/2}$$

where, t = thickness of the tube

R = mean radius of the tube

$\frac{1}{m}$ = poisson's ratio of the tube material

E = Young's modulus

Tubulars

The tubular tension members do not have any advantage as tension members and rather they have higher cost of production than other rolled steel sections.

Design of tubulars

The tensile and compressive strength in the extreme fibres of tubes in bendings should not exceed the permissible values at given Table - 3, Table - 4 of the code.

Q.1 A tubular steel column of 4.8 m length is hinged at both ends. It has nominal diameter of 225 mm and conforms to Ys+25 grade. Determine the safe load carrying capacity of the column.

Solution - Given data -

$$L = 4.8 \text{ m} = 4800 \text{ mm}, d = 225 \text{ mm}$$

End condition, so, $L = L_e = 4800 \text{ mm}$

Radius of gyration of the corresponding to nominal diameter of the 225 mm (heavy), $r = 84.4 \text{ mm}$
 $= 84.4 \text{ mm}$

So, Slend

$$\text{ratio} = \lambda = \frac{L_e}{r} = \frac{4800}{84.4} = 56.87 < 180$$

Maximum slen ratio $= \lambda = 180$

Again, for Ys+25 and $\lambda/r = 56.87$,

$$f_c = 114.96 \text{ N/mm}^2 \text{ (using interpolation from Table-2)}$$

So, the safe load carrying capacity of the member

$$\Rightarrow F = A f_c$$

$$\Rightarrow F = 4420 \times 114.96$$

$$= 508.14$$

Area of the tube = 4420 mm²
 from Table-1 of
 IS 1161-1998

Tubular

Various members of the roof truss are subjected to axial compressive and tensile forces only. The elements of the truss are generally joined by welding.

(2) Design a tubular steel purlin for the following data
 spacing of roof truss = 3.5 m spacing of purlin along the slope of the roof = 2 m Vertical load from roof sheeting etc = 150 N/m^2 Live load on the roof = 0.75 kN/m^2 . The purlin is effectively continuous over the rafters. Assume all loads acting normal to the roof and use $\gamma_s = 22$ grade.

Solⁿ

Vertical load on the purlin per meter length

Area of the roof load coming to the purlin per meter run = $2 \times 1 = 2 \text{ m}^2$

Vertical load from roof sheeting etc = $150 \times 2 = 300 \text{ N/m}$

Assuming self wt. of tubular purlin = 50 N/m

Live load on the purlin $750 \times 2 = 1500 \text{ N/m}$

Total load = $w = 300 + 50 + 150 = 1850 \text{ N/m}$

Total load on the purlin = $wL = 1850 \times 3.5 = 5550 \text{ N}$

Maximum bending moment in the purlin = $\frac{wL^2}{12}$

$$= \frac{5550 \times 3.5}{12}$$

$$= 1618.75 \text{ Nmm}$$

Allowable bending stress in the purlin = $F_b = 140 \text{ N/mm}^2$

$$\text{Required section modulus} = Z = \frac{M}{F_b} = \frac{1618.75 \times 100}{140}$$

$$= 11562.5 \text{ mm}^3$$

$$= 11.56 \text{ cm}^3$$

Let us provide a 65 mm nominal dia light steel tube 5.71 kg/m and section modulus = 12.82 cm^3

check for deflection -

$$\begin{aligned}\text{Minimum outside dia} &= \frac{L}{70} \\ &= \frac{3500}{70} \\ &= 50 \text{ mm} < 65 \text{ mm OK}\end{aligned}$$

$$\begin{aligned}\text{Minimum section modulus: } Z &= \frac{wL}{16800} = \frac{5550}{9.81 \times 40} \\ &= 13.497 \text{ cm}^3\end{aligned}$$

Hence, adopt a 65 mm nominal dia medium steel tube having section modulus 14.20 cm^3 @ 6.42 kg/m and $A = 8.20 \text{ cm}^2 = 820 \text{ mm}^2$

check for stress developed -

Self wt of purlin = 6.42 kg/m

check for bending stress -

$$\begin{aligned}\text{Total VDL on the purlin} &= 300 + 63 + 1500 \\ &= 1863 \text{ N}\end{aligned}$$

$$\text{Total load/m} = 1863 \times 3.5 = 6520.5 \text{ N/m}$$

Maximum bending moment in the purlin

$$\begin{aligned}m &= \frac{wL^2}{12} \\ &= \frac{6520.5 \times 3.5^2}{12} \\ &= 1901.81 \text{ N/m}\end{aligned}$$

Maximum bending stress in the purlin

$$\begin{aligned}f &= \frac{m}{Z} \\ &= \frac{1901.81}{14200} = 133.93 < 140 \text{ N/mm}^2 \text{ OK}\end{aligned}$$

check for shear stress force $P = \frac{W}{2} = \frac{62500}{2}$
 $= 3260.25 \text{ N}$

Maximum shear stress $= \frac{P}{A/2}$
 $= \frac{3260.25}{820/2}$
 $= 7.91 \text{ N/mm}^2$

Introduction -

A masonry structure is an assemblage of masonry units or blocks properly added together with mortar. - The masonry units are solid or perforated burnt clay bricks, sand-lime bricks, stones, concrete blocks, lime based blocks or burnt clay hollow blocks. The basic advantages of masonry construction lie in the fact that in load bearing structures it performs a variety of function such as supporting loads, subdividing space, provide thermal and acoustic insulation, offering fire and weather protection etc. It is suited for buildings where the floor area is subdivided into a large number of rooms of smaller medium size and the floor plan is repeated in each storey throughout the height of the buildings, ho nursing home, hospitals, schools and certain type of administrative buildings.

Masonry units -

Masonry units used in construction are properly bonded together with some cementing material say mortar. Many masonry units are used in construction, but bricks and concrete blocks are largely used for structural units choice of generally made from the consideration of local availability, compressive strength

durability, cost and of construction.

The relationships between compressive strength of bricks and maximum number of storeys in case of simple residential building having one brick thick walls and rooms of medium size is given below.

Comp. strength (N/mm ²)	no. of storeys
3 - 3.5	1 to 2
4 to 5	2 to 3
7 to 15	3 to 4, 4 to 5

Mortar

Mortar is a mixture of some cementing materials such as cement lime and fine aggregate (such as sand, burnt clay, lime etc). Mortar is broadly classified into three types such as,

- (i) Cement mortar
- (ii) Lime mortar
- (iii)

Cement Mortar

These consists of cement and sand, varying in proportion from 1:8 to 1:3 strength and workability in priming with the brick are in the proportion of cement. Rich mortar has through having good strength have high shrinkage and are thus more liable to cracking.

Lime Mortar - These consist of intimate mixture of lime as binders and sand, burnt clay / su bonders as fine aggregate in proportion 1:2 to 1:3. Lime mortar gain strength slowly and have low ultimate strength. Mortar having hydraulic lime attain some what be strength than flat lime. Lime mortar is good workable, having good water resist and low

Cement - Lime mortar

These mortars combine good qualities of constant as well as lime mortar, that is medium strength along with good workability, good water resistivity, freedom from cracks and good resistance against crack and good resistance against rain penetration. Commonly used proportions (Cement : Lime : Sand) 1:1:6, 1:2:9 and 1:3:12. It is much better than cement mortar for masonry work in most of the structures.

Grades of Mortar

(IS 2790-1 of 1965)

Grade of mortar	Min proportion by loose volume			Minimum compressive strength (N/mm^2) at 28-days
	Cement	Lime	Sand	
M4	1	$\frac{1}{4}$ parts	3	10.00
M2	1	$\frac{1}{4}$ parts	4	7.50
M1	1	$\frac{1}{2}$ parts	$4\frac{1}{2}$	6.00
M2	1	-	5	5.00
M3	1	-	6	3.00
M4	1	-	7	1.50
L1	1	-	8	0.7
L2	-	1 part	3	0.5

where, A = Hydrate lime
B = Semi-hydraulic lime
C = Fat lime

Design of masonry walls.

From the structural design consideration wall can be classified into types such as

(a) Load bearing wall

(b) Non-load bearing wall

Load-bearing walls -

A wall that carry an imposed vertical load in addition to its own weight together with any lateral load.

Non-load bearing walls -

A wall does not require support any load such that it can be removed with the approval of a structural engineer without hampering the integrity of the remaining structure.

Design considerations for load

- (i) Masonry buildings are mainly constructed of load bearing walls where walls are used to transfer gravity as well as lateral loads to the foundation in addition to its of subdividing space providing thermal and acoustic insulation providing fire resistance and providing weather protection.

- (ii) while transforming design loads, the masonry is subjected to mainly compressive, tensile and shear strength which should be well within permissible limits and the wall should not buckle or overturn.
- (iii) Load bearing walls are structurally more efficient when the load is uniformly distributed and the structure is so planned that the eccentricity of loading on the member is as small as possible.
- (iv) Avoidance of eccentric loading by providing adequate bearing of roof slabs on the wall providing adequate stiffness of especially important in load bearing walls in masonry structure.
- (v) In order to ensure uniformly loading openings in walls should not be too large and there should be of 'hole in the wall' type as far as possible.
- (vi) Beings for lintels and bed blocks under beams should be liberal in since heavy uncertainty of loads should be varied where feasible with the loadings so as to obtain more or less uniform stress in adjoining points of the members.

Design loads-

- The loads to be taken in consideration for design of masonry walls are (i) Gravity loads - Vertical loads such as dead load (DL), (LL) Live load of the super structures.
- (ii) Lateral loads - Horizontal loads like - accidental load (AL), wind load (WL) and earthquake load (EL).

Permissible structures

(Clause - 5.4 of IS 1905-1987)
to be followed

Permissible compressive stress - The permissible stress (F_c) shall be based on the value of the basic compressive stress (F_c) taking into account the influence of slenderness ratio of the wall, eccentricity of loading, area of cross section of the wall, shape of the masonry units and the type of loading (uniform and concentrated) (Clause - 5.4.1 of IS-1905-1987) ←

Design consideration for non-load bearing walls -

- A non-load bearing wall is often designed to resist only to lateral loads. It may be provided as an exterior wall to protect against weather and as an interior wall for the purpose of partitioning. Hence a non-load bearing wall may be called a panel wall, curtain wall/partition wall.
- Panel wall are non-load bearing exterior walls in framed construction wholly supported on each storey and subject to lateral loads only.
- Curtain walls are supported by horizontal and vertical structural members where necessary and subjected to lateral loads only.

Effective height of masonry walls (Table - 4 of IS - 1905:1987)

Effective length of masonry walls (Table - 5 of IS - 1905:1987)

Effective thickness -

Effective thickness (t) of a solid wall shall be its actual thickness, including the thickness of joint between masonry units.

Slenderness Ratio (SR) -
$$\frac{\text{Effective height or Effective length}}{\text{Effective thickness}}$$

For walls, which ever of smallest Max^m SR - (Refer Table - 7 of IS - 1905 - 1987)

The angle of dispersion of vertical load on wall shall be taken as not more than 30° from the vertical

Free standing wall (Table - 11 of IS - 1905 - 1987)

P

- Q.1 A ground floor masonry wall 4m clear ht up to bottom of the roof slab. It is of plinth above foundation footing = 0.8m. If the wall thickness 30cm calculate effective ht and slenderness ratio for partial restraint and both end cond.

Ht of wall measured from top of the footing = $4 + 0.8 = 4.8 \text{ m}$
(from note - 2, clause - 4.3.1)

From IS 800-1987

effective ht of wall = $1.0 \times 4.8 = 4.8 \text{ m}$

slenderness ratio (SR) = $\frac{h}{t} = \frac{4.80}{0.3} = 1.6$

- ② A masonry wall is 4.0 m ht and 6.0 m length calculate effective length of the wall for the support conditions wall is supported by a cross wall at one end and connected with cross wall at the other hand.

Soln:-

For the case as given in question,

length = 6 m, ht = 4 m

Effective length = 0.9 l (sl no - 2 of Table - 5
of IS - 1905 - 1987)

$$= 0.9 \times 6$$

$$= 5.4 \text{ m}$$